

REGENCY LIBERTY® RADIANT LRi3E

Compact Gas Fireplace Insert



LRi3E shown with Vignette faceplate in Black and Rustic Brown interior panels.



Small backing plate and Vignette faceplate in Platinum



Regular backing plate and Vignette faceplate in Tuscan Sunset



Arched backing plate and arched Vignette faceplate in Black

COMPACT AND EFFICIENT

Regency is proud to present the newest addition to the Liberty gas insert family, now available in a smaller size to fit a larger array of spaces. Enjoy timeless, artisan-crafted logs with the combined power of radiant & convective heat. Vignette designer faceplates provide you with the choice to create a modern transitional look or a traditional look with Georgian & Tudor styles.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	20,500	19,000
Turn down to (BTU)	14,000	15,500
Efficiency (steady state)	73.12%	74.59%
EnerGuide Rating (Canada only)	66.25%	66.70%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)	
Width (front)	28-1/2"
Width (rear)	21-5/8"
Height	19-1/2"
Depth	14-1/2"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace. See product specifications on page 31.



LRi3E shown with 4-sided regular backing plate and Vignette faceplate in Platinum.



Regular backing plate, Vignette faceplate in Black and Craftsman inlay in Black



Regular backing plate, Vignette faceplate and Door inlay in Black



Arched backing plate and arched Vignette Tudor faceplate in Black

STANDARD FEATURES

- Sleek and compact size to accommodate for a variety of spaces
- Versatile design choices to create a traditional or modern transitional look
- Log set with ceramic ember bed
- Heat radiating ceramic glass with safety screen
- Variable speed blower for max heat distribution
- Proflame II GTMF remote control system
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Interior panels in Old Town Red, Rustic Brown or Volcanic Black
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Hearth trim kit and mantel deflector
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

REGENCY LIBERTY® RADIANT LRi4E

Medium Gas Fireplace Insert



LRi4E shown with regular backing plate, Vignette faceplate in Black, Door Inlay in Black and Rustic Brown Brick Panels.



Small backing plate and Vignette faceplate in Platinum



Regular backing plate and Vignette faceplate in Tuscan Sunset



4-sided regular backing plate and Vignette faceplate in Black

PERFORMANCE AND STYLE

The Liberty Radiant LRi4E gas insert exemplifies Regency's renowned commitment to quality. A source of both radiant and convective heat, the LRi4E delivers high-efficiency heat safely and reliably throughout your home. Turn on the integrated circulating fan to intensify the warming effect. This statement fireplace can be customized with Regency's selection of accent trim options.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	31,000	31,000
Turn down to (BTU)	22,000	26,000
Efficiency (steady state)	71.45%	73.01%
EnerGuide Rating (Canada only)	70.27%	69.36%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)	
Width (front)	30"
Width (rear)	22"
Height	20"
Depth (without spacer)	18"
Depth (with spacer)	15-3/4"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace. See product specifications on page 31.



LRI4E shown with arched backing plate and decorative arched Vignette faceplate in Black.



Regular backing plate, Vignette faceplate in Black and Craftsman inlay in Black



Regular backing plate, Vignette faceplate in Black and Door inlay in Black



Regular backing plate and Vignette Georgian faceplate in Black

STANDARD FEATURES

- A variety of trims available to add a unique design touch
- Log set with ceramic ember bed
- Heat radiating ceramic glass with safety screen
- 6-tube heat exchanger for max efficiencies
- Variable speed blower for max heat distribution
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Faceplate spacer for shallow fireplace installations
- Interior panels in Old Town Red, Rustic Brown or Volcanic Black
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kits for raised hearth installations
- Wall thermostat
- Regency flex liners
- Propane conversion kit

REGENCY LIBERTY® RADIANT LRi6E

Large Gas Fireplace Insert



LRi6E shown with decorative arched Vignette and arched backing plate in Black.



Small backing plate and Vignette faceplate in Tuscan Sunset



Regular backing plate and Vignette faceplate in Black



4-sided regular backing plate and Vignette faceplate in Platinum

RADIANT CONVECTIVE HEAT

This large, high-efficiency heater provides intense radiant heat instantly. Enjoy strong heat in the area directly in front of your fireplace or turn on the included heat circulating blower to distribute comforting warmth into the far corners of your room. The Regency Liberty LRi6E large gas insert is a stylish, reliable source of warmth and ambiance, even during a power outage.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	38,000	38,000
Turn down to (BTU)	25,000	30,000
Efficiency (steady state)	73.01%	73.01%
EnerGuide Rating (Canada only)	70.37%	70.37%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)	
Width (front)	34"
Width (rear)	25"
Height	24"
Depth (without spacer)	19-1/2"
Depth (with spacer)	16-3/4"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace. See product specifications on page 31.



LRi6E shown with regular backing plate, Vignette faceplate in Black, Craftsman inlay in Black.



Regular backing plate, Vignette faceplate in Black, Door inlay in Black



Regular backing plate, Vignette Tudor faceplate in Black



Arched backing plate and arched Vignette faceplate in Black

STANDARD FEATURES

- A generous range of media options, inlays, and faceplates available to customize to your liking
- Black steel interior panels
- Log set with ceramic ember bed
- Heat radiating ceramic glass with safety screen
- 6-tube heat exchanger for max efficiencies
- Variable speed blower for max heat distribution
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- 6-tube heat exchanger for max efficiencies
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Faceplate spacer for shallow fireplace installations
- Interior panels in Old Town Red, Rustic Brown or Volcanic Black
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kits for raised hearth installations
- Wall thermostat
- Regency flex liners
- Propane conversion kit

REGENCY LIBERTY® L234

Small Gas Fireplace Insert



L234 shown with Low Profile faceplate and brick panels.

COMPACT SIZE FOR TIGHTER OPENINGS

Designed to fit smaller openings in existing masonry fireplaces, and inefficient steel fireplaces, the L234 small gas insert delivers efficient heat with stylish good looks. Highly realistic logs make this quality, small gas insert an excellent choice for small to medium size spaces.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	23,500	21,500
Turn down to (BTU)	16,500	17,000
Efficiency (steady state)	73.94%	74.67%
EnerGuide Rating (Canada only)	63.34%	64.73%

STANDARD FEATURES

- Heat radiating ceramic glass with safety screen
- Log set with glowing embers
- Flame height adjustment control
- Variable speed blower
- Proflame I GTM remote control
- Standing pilot system with 7-Day timed shut off
- Direct spark ignition
- Direct vent to increase efficiency & warmth retention
- Installation spacer
- Natural gas
- Limited lifetime warranty

Note: This unit is only available in select markets.

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	25"
Width (rear)	16"
Height	17"
Depth (without spacer)	14"
Depth (with spacer)	--

OPTIONS


- Low profile faceplate
- Custom backing plate
- Adjustable hearth riser
- Brick panels
- Basic or programmable thermostat
- 3" to 2" air intake reducer
- Regency flex liners
- Propane conversion kit

OTHER OPTIONS

DIRECT VENT TECHNOLOGY


A Regency gas insert is a specially engineered, sealed fireplace that slips into your existing masonry or pre-fab fireplace to create a high-efficiency heating system with a beautiful fire. The airtight firebox uses outside air for combustion, helping maintain indoor air quality and keeping all the warmth generated from your fireplace in your home.

Even when the fireplace is turned off, the sealed system will prevent cold air from entering the home and warm air from leaving.

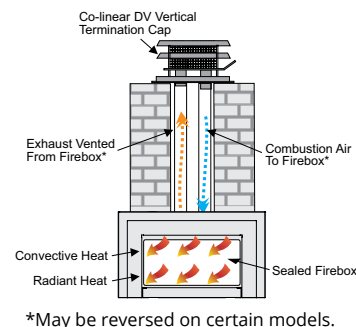

PROFLAME II GAS INSERT HARDWIRE KIT

This kit allows you to have a hard-wire electrical connection within your existing fireplace for a safe and cord free installation.




INTELLIGENT IGNITION SYSTEM*

Regency gas fireplace inserts feature an Intelligent Ignition System that lights the pilot only when needed, reducing gas usage and costs. In colder climates, it can be set to Continuous Pilot Mode (CPI), keeping the pilot lit for up to seven days. With a new 5-second Flame Failure Response Time (FFRT) sensor, it ensures reliable ignition even in cold conditions, enhancing performance and efficiency.

*Not available on L234, U31, E33, Gi29LU.

SPREAD THE WARMTH

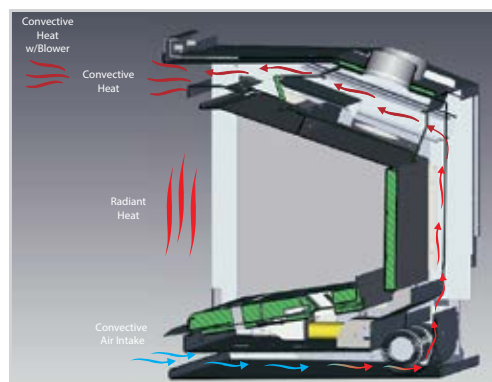

Blower

Note: This unit is only available in select markets.

REMARKABLE EFFICIENCY

The precision-engineered heat exchanger systems dramatically increase the overall heating efficiency of these Regency gas inserts. The cold air from your room passes through the pre-heated heat exchanger system, which is then re-distributed back into your room as comforting warm air (also known as convection heat).

POWERFUL RADIANT HEAT

Not only do these gas inserts include the latest innovations in fireplace technology and efficiencies, they also generate a large amount of radiant heat from the flames of the fire package. The heat from the fire radiates through the ceramic glass and transfers that warmth to you, providing the perfect combination of radiant and convective heat distribution.

VARIABLE SPEED BLOWER TO MAXIMIZE EFFICIENCY

Regency blowers are a standard feature with all gas inserts. A blower will let you enjoy the warmth of your fireplace from any corner of your living space. Our quiet blowers increase the efficiency of your fireplace by pushing the heat produced by your fireplace forward, distributing it further, and evenly into your room.

ATMOSPHERE COLLECTION – ACCESSORIES

Mix & match accessories along with almost 450 different combinations create the look you desire. The modular accessory system, featured in our most flexible gas inserts ever, enables you to tailor your fireplace to match your home and décor perfectly.

FRONT OPTIONS



3-sided & 4-sided
Finishing Trim



Regular Faceplate
with Premium Sunset
Bronze Surround



Flush 3-Sided Faceplate



Flush 4-Sided Faceplate



Flush Faceplate with
Traditional Surround

PREMIUM SURROUNDS



Black



White



Sunset Bronze



Grey



Brushed Nickel




Black




Brushed Antique
Copper

TRADITIONAL SURROUNDS

INTERIOR PANEL OPTIONS



Brown Brick



Herringbone Brick



Castlestone Brick



Volcanic Black Brick



Painted Black



Reflective Black Glass

FIREBED OPTIONS



Oak Log Set



Birch Log Set



Driftwood Log Set

BACKING PLATES



Custom 3-sided



Custom 4-sided




Oversized

LIBERTY AND HORIZON OPTIONS


VIGNETTE FACEPLATE OPTIONS (NOT AVAILABLE ON ALL MODELS)




Vignette with 3-sided Backing Plate




Vignette with 4-sided Backing Plate



Tudor Rustic Vignette Faceplate



Arched Vignette Faceplate




Decorative Arched Vignette Faceplate


BACKING PLATE OPTIONS*




Small Backing Plate




Arched Backing Plate



Regular Backing Plate



4-sided Regular Backing Plate




Oversized Backing Plate

*Custom sizes also available

VIGNETTE INLAY OPTIONS



Vignette Door Inlay**




Vignette Craftsman Inlay**

VIGNETTE FACEPLATE & VIGNETTE INLAY FINISHES



Black



Black Chrome



Tuscan Sunset



Platinum
(Not available
for inlays)

CRYSTALS & FIREBEADS



Crystals - Black



Crystals - Copper



Crystals - Starfire



Firebeads - Black



Firebeads - Caramel Luster



Firebeads - Glacier Ice

STONES & LOGS



Volcanic Stones - Gray



Volcanic Stones - Tan



Ceramic Spa Stones



Natural River Pebbles



Driftwood Ceramic Log Set

INNER PANELS



Reflective Black Enamel Panels




Standard - Rustic Brown



Standard - Old Town Red



Standard - Volcanic Black



Black Steel
(Available for LRI4E and HRI4E only)

ACCESSORIES

ACCESSORIES - AT A GLANCE				LRi3E	HRI3E	LRi4E	HRI4E	LRi6E	HRI6E	E33	U31	L234	
Horizon firebed	Crystals in various colors			•	★	•	★	•	★	•	•	•	
	Firebeads in various colors			•	★	•	★	•	★	•	•	•	
	Ceramic spa stones			•	★	•	★	•	★	•	•	•	
	Volcanic stones			•	★	•	★	•	★	•	•	•	
	Driftwood log set (natural gas only on HRI4E & HRI6E)			•	★	•	★	•	★	•	•	•	
Backing plates	Small			★	★	★	★	★	★	•	•	•	
	Regular			★	★	★	★	★	★	•	•	•	
	4-sided regular			★	★	★	★	★	★	•	•	•	
	Oversized			★	★	★	★	★	★	•	•	•	
	Arched			★	★	★	★	★	★	•	•	•	
Vignette faceplates	Vignette		Black	★	★	★	★	★	★	•	•	•	
			Black chrome	★	★	•	•	•	•	•	•	•	•
			Platinum	★	★	★	★	★	★	•	•	•	•
			Tuscan sunset	★	★	★	★	★	★	•	•	•	•
	Vignette – 4-sided		Black	•	•	•	•	•	•	★	•	•	
	Rustic Vignette	Tudor	Black	★	★	★	★	★	★	•	•	•	
	Arched Vignette	Arched	Black	★	★	★	★	★	★	•	•	•	
		Decorative Arched	Black	★	★	★	★	★	★	•	•	•	
Vignette inlays	Door inlay		Black	★	★	★	★	★	★	★	•	•	
	Craftsman inlay		Black	★	★	★	★	★	★	•	•	•	
Low profile faceplates	Low profile – 3-sided		Black	•	•	•	•	•	•	★	★	★	
	Low profile – 3-sided – oversize		Black	•	•	•	•	•	•	★	•	•	
	Low profile – 3-sided – custom		Black	•	•	•	•	•	•	★	★	★	
Contour faceplate			Black	•	•	•	•	•	•	•	★	•	
Louvers			Black	•	•	•	•	•	•	•	★	•	
Inner panels	Bricks		Rustic brown	★	•	★	•	★	•	★	★	★	
			Old town red	★	•	★	•	★	•	★	★	★	
			Volcanic black	★	•	★	•	★	•	•	•	•	
	Steel	Black		•	✓	★	★	✓	✓	✓	✓	✓	
	Reflective	Black enamel		★	★	★	★	★	★	•	•	•	
Safety screen				✓	✓	✓	✓	✓	✓	✓	✓	✓	
Spacer				•	•	★	★	★	★	•	•	✓	
Hearth trim				★	★	★	★	★	★	★	★	★	
Variable speed blower				✓	✓	✓	✓	✓	✓	✓	✓	✓	
Wall thermostat				★	★	★	★	★	★	★	★	★	
Remote control	Proflame GT			•	•	•	•	•	•	•	✓	•	
	Proflame GTM			•	•	•	•	•	•	✓	•	✓	
	Proflame GTMF			✓	✓	✓	✓	✓	✓	•	•	•	
Turn down flame modulator				✓	✓	✓	✓	✓	✓	✓	✓	✓	
Direct vent				✓	✓	✓	✓	✓	✓	✓	•	✓	
B-Vent				•	•	•	•	•	•	•	✓	•	
Intelligent Ignition system				✓	✓	✓	✓	✓	✓	•	•	•	
Propane conversion kit				★	★	★	★	★	★	★	★	★	

- Not available
- ✓ Standard
- ★ Optional

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information.

OTHER OPTIONS

MAXIMIZING COMFORT AND EFFICIENCY

Regency Fireplace Inserts deliver controllable heat solutions that combine the latest in radiant and convection heat technology with innovative features:

- Adjustable flame/heat control with Proflame remote controls (not available for U31)
- Heat radiating ceramic glass for maximum radiant heat
- Safety screen
- Variable speed blower to distribute heat into the farthest corners of your room
- Intelligent Ignition System* features fuel-saving intermittent pilot ignition (IPI), 7-day continuous pilot mode (CPI), and 5-second Flame Failure Response Time (FFRT) for more reliable startups, even in cold weather.
- Power's Out, Heat's On. Never worry about being cold during a power outage again! All Regency gas fireplaces operate without electricity. Enjoy peace of mind all winter long.

*Not available for L234, U31, E33, Gi29LU.

REMOTE CONTROL - INCLUDED



Proflame I GTMF Remote Control

*May be black on select models.



Proflame II GTMF Remote Control

Create optimal comfort with ease and convenience at the touch of a button with a Regency remote control. Our **user-friendly programmable controls** can be set, adjusted, and programmed for your fireplace to turn on at the temperature you want, when you want it.


FEATURE	DESCRIPTION	PROFLAME REMOTES		
		GT	GTM	GTMF
On/off		✓	✓	✓
Child lock		✓	✓	✓
LCD backlit screen		✓	✓	✓
Temperature display	°F / °C	✓	✓	✓
Thermostat	one setting (all days)	✓	✓	✓
Smart thermostat**		✓	✓	✓
Flame adjustment	(6 levels)	•	✓	✓
Fan control	(6 levels)	•	•	✓

- Not available
- ✓ Standard

**Smart Thermostat - Rather than a thermostat that simply turns your fireplace on and off, the smart control function allows you to set your desired room temperature. As the room reaches your personal setting, the flame intensity and heat will gradually decrease – keeping the ambiance of your Regency fire on with less heat output, and the option to turn it off at any time.

SAFETY SCREEN

Regency has integrated a custom designed safety screen into each faceplate design that meets or exceeds current North American safety legislation.



APP CONTROL*


The optional Wifi enabled module provides the ultimate fireplace control with the ProFlame Connect Plus App.




*Available on select units.

DIMENSIONS


LRI6E, HRI4E, LRI4E, HRI3E, LRI3E, E33, L234, U31 SPECIFICATIONS




FRONT VIEW



TOP VIEW



SIDE VIEW OF HRI6E,
LRI6E, HRI4E, LRI4E,
HRI3E, LRI3E, E33, L234



SIDE VIEW
OF U31

UNIT	A	B	A1	B1	C	D	F	G
HRI6E	33-15/16"	23-5/8"	28-3/16"	18-5/16"	19-3/16"	14-11/16"	--	24-1/2"
LRI6E	33-15/16"	23-5/8"	28-3/16"	18-5/16"	19-3/16"	14-11/16"	--	24-1/2"
HRI4E	30"	20"	24-3/16"	14-3/4"	17-7/8"	14-5/16"	--	21-11/16"
LRI4E	30"	20"	24-3/16"	14-3/4"	17-7/8"	14-5/16"	--	21-11/16"
HRI3E	28"	19"	22-11/16"	14-1/4"	14"	10-3/8"	--	21-1/4"
LRI3E	28"	19"	22-11/16"	14-1/4"	14"	10-3/8"	--	21-1/4"
E33	32-1/4"	23-3/4"	30-3/8"	14-3/4"	16-1/4"	11-1/16"	--	24-1/2"
U31	26-1/16"	20-1/4"	24-1/2"	13"	13-1/2"	11"	11/16"	22-1/2"
L234	24-3/4"	16-7/8"	17-3/4"	12-1/2"	14-11/16"	11-3/4"	--	14-3/4"

BACKING PLATE DIMENSIONS


BACKING PLATE	HRI6E		LRI6E		HRI4E		LRI4E		HRI3E		LRI3E	
	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Small	41"	27-3/4"	41"	27-3/4"	37-1/8"	23-5/8"	37-1/8"	23-5/8"	31-1/4"	23-3/8"	31-1/4"	23-3/8"
Regular (3-sided)	47-3/8"	30-1/2"	47-3/8"	30-1/2"	41-5/8"	26"	41-5/8"	26"	35-3/4"	25-5/8"	35-3/4"	25-5/8"
Regular (4-sided)	47-3/8"	34-1/8"	47-3/8"	34-1/8"	41-5/8"	29-1/4"	41-5/8"	29-1/4"	35-3/4"	28-5/8"	35-3/4"	28-5/8"
Oversized	48-3/8"	33"	48-3/8"	33"	44"	30"	44"	30"	38-3/16"	29-5/8"	38-3/16"	29-5/8"
Custom Backing Plate	Custom Order Only											

BACKING PLATE	HRI6E/LRI6E			HRI4E/LRI4E			HRI3E/LRI3E		
	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT
Arched	50-7/8"	33-1/16"	29-13/16"	45-7/8"	28-15/16"	25-15/16"	40-15/16"	27-11/16"	24-1/2"

NOTE: All product specifications are subject to change without notice. Always refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

LRI6E, HRI4E, LRI4E, HRI3E, LRI3E, E33, L234,U31 SPECIFICATIONS

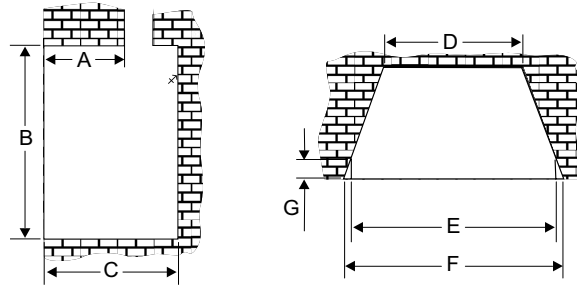

MINIMUM FIREPLACE OPENINGS		A	B	C	D	E	F	G
HRI6E	Vignette Faceplate	12-1/2"	24"	19-1/2"	25"	34"	37"	4-3/4"
	Vignette Faceplate + Spacer	10"	24"	16-3/4"	25"	34"	35-3/8"	2-1/4"
	Arched Vignette Faceplate	13-1/2"	25-3/4"	22-3/8"	25"	35-3/4"	37"	6"
	Arched Vignette Faceplate + Spacer	12"	24"	19-1/2"	25"	34"	36-1/4"	4-3/4"
LRI6E	Vignette Faceplate	12-1/2"	24"	19-1/2"	25"	34"	37"	4-3/4"
	Vignette Faceplate + Spacer	10"	24"	16-3/4"	25"	34"	35-3/8"	2-1/4"
	Arched Vignette Faceplate	13-1/2"	25-3/4"	22-3/8"	25"	35-3/4"	37"	6"
	Arched Vignette Faceplate + Spacer	12"	24"	19-1/2"	25"	34"	36-1/4"	4-3/4"
HRI4E	Vignette Faceplate	12-1/4"	20"	18"	22"	30"	35-5/8"	4-3/8"
	Vignette Faceplate + Spacer	10"	20"	15-3/4"	22"	30"	31-1/4"	2-1/8"
	Arched Vignette Faceplate	14"	21-1/2"	21-1/8"	22"	30-1/2"	37"	5-3/8"
	Arched Vignette Faceplate + Spacer	12-1/2"	20"	17-1/2"	22"	30"	36-1/4"	4"
LRI4E	Vignette Faceplate	12-1/4"	20"	18"	22"	30"	35-5/8"	4-3/8"
	Vignette Faceplate + Spacer	10"	20"	15-3/4"	22"	30"	31-1/4"	2-1/8"
	Arched Vignette Faceplate	14"	21-1/2"	21-1/8"	22"	30-1/2"	37"	5-3/8"
	Arched Vignette Faceplate + Spacer	12-1/2"	20"	17-1/2"	22"	30"	36-1/4"	4"
HRI3E	Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-1/2"	31-1/8"	4"
	Arched Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-5/8"	31-1/8"	4"
LRI3E	Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-1/2"	31-1/8"	4"
	Arched Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-5/8"	31-1/8"	4"
E33	Low Profile Faceplate	9-1/4"	25-1/2"	18"	25"	N/A	35-1/4"	N/A
	Low Profile Faceplate + Spacer	8"	24-3/16"	16-3/4"	25"	N/A	32-1/4"	N/A
U31	Low Profile Faceplate	8-1/8"	21"	15"	22-1/2"	N/A	26-1/2"	N/A
L234	Low Profile Faceplate	N/A	17"	14" (with spacer) 15-5/8" (without spacer)	16"	N/A	25"	N/A

A - Max. lintel bar depth

G - Front depth prior to taper

FACEPLATES	HRI6E		LRI6E		HRI4E		LRI4E		HRI3E		LRI3E	
	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Vignette and Rustic Vignette	40-1/16"	26-13/16"	40-1/16"	26-13/16"	35-1/16"	22-11/16"	35-1/16"	22-11/16"	29-1/4"	22-1/8"	29-1/4"	22-1/8"
Vignette Spacer	39-15/16"	26-3/4"	39-15/16"	26-3/4"	34-15/16"	22-5/8"	34-15/16"	22-5/8"	--	--	--	--
Hearth Trim - Sizes	Please See Manual For Details											

FACEPLATES	HRI6E/LRI6E			HRI4E/LRI4E			HRI3E/LRI3E		
	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT
Arched Vignette	45-3/8"	30-7/16"	27-13/16"	40-1/4"	26-1/8"	23-3/4"	35-15/16"	25-3/16"	22-3/4"
Spacer	45-3/8"	30-7/16"	27-13/16"	40-1/4"	26-1/8"	23-3/4"	--	--	--

NOTE: All product specifications are subject to change without notice. Always refer to the relevant product manual for full and up-to-date information.

DIMENSIONS


FACEPLATES		E33		U31		L234	
		WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Vignette (3-Sided)		46-1/2"	28-3/4"	--	--	--	--
Vignette (4-Sided)		46-1/2"	30-7/8"	--	--	--	--
Custom Faceplate (3-Sided Vignette Only)		Custom Order Only		--	--	--	--
Spacer (3-Sided Vignette Only)		45"	28"	--	--	--	--
Low Profile (3-Sided)	Front Plate	42-7/16"	26-3/4"	36"	22-1/8"	29-1/8"	21"
	Rear Plate	46-1/2"	28-11/16"	40-13/16"	24"	32-7/8"	22-7/8"
Low Profile (3-Sided Oversize)	Front Plate	42-7/16"	26-3/4"	--	--	--	--
	Rear Plate	49-9/16"	33-1/8"	--	--	--	--
Low Profile (3-Sided) Custom	Rear Plate	Custom Order Only					
Low Profile (4-Sided) Custom	Rear Plate	Custom Order Only					
Hearth Trim - Sizes		Please See Manual For Details					

MINIMUM CLEARANCES

MINIMUM CLEARANCE TO COMBUSTIBLES	Gi25LE	Gi27LE	Gi29LE	Gi29LU	Gi33LE
A Side Wall	8"	8"	8"	8"	8"
B Ceiling	60"	60"	60"	60"	60"
C Mantel Height (Min.)	29-5/8"	30"	32-3/4"	32-3/4"	36-1/2"
	(With Optional Deflector) 26-5/8"	28"	30-3/4"	30-3/4"	34-1/2"
D Mantel Depth (Min.)	1-1/2"	9"	1-1/2"	1-1/2"	1-1/2"
	(With Optional Deflector) 1-1/2"	9"	1-1/2"	1-1/2"	1-1/2"
E Alcove Width	54"	54"	54"	54"	56"
F Max. Alcove Depth	36"	36"	36"	36"	36"

NON-COMBUSTIBLE HEARTH REQUIREMENT					
G Hearth Height	0"	0"	0"	0"	*0-2"
H Hearth Width	0"	0"	0"	0"	*36"
I Hearth Depth	0"	0"	0"	0"	*12"

* Hearth not required if appliance is raised off the ground 2" from Finished Floor.

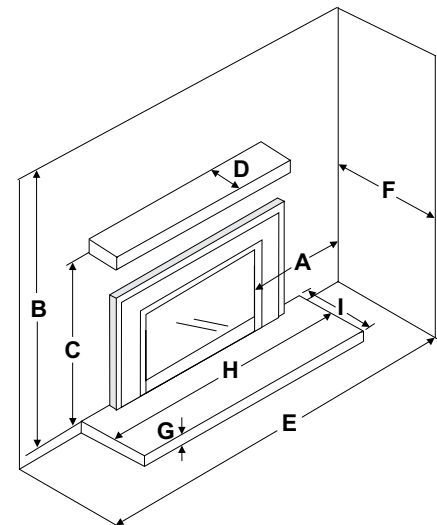

MINIMUM CLEARANCE TO COMBUSTIBLES	HRi6E	LRi6E	HRi4E	LRi4E	HRi3E	LRi3E	E33	U31	L234
A Side Wall	12"	12"	8"	8"	6"	6"	8"	10"	8"
B Ceiling	60"	60"	60"	60"	60"	60"	72"	67"	73"
C Mantel Height (Min.)	40"	40"	35"	35"	38"	38"	40"	32-1/2"	38"
	(With Optional Deflector) 36"	36"	32"	32"	28"	28"	N/A	N/A	N/A
D Mantel Depth (Min.)	1"	1"	1"	1"	1"	1"	0 - 3-1/2"	0 - 3-1/2"	1"
	(With Optional Deflector) 1"	1"	1"	1"	1"	1"	N/A	N/A	N/A
E Alcove Width	56"	56"	54"	54"	54"	54"	76"	48"	60"
F Max. Alcove Depth	36"	36"	36"	36"	36"	36"	36"	36"	36"

NON-COMBUSTIBLE HEARTH REQUIREMENT									
G Hearth Height	1-3/8"	1-3/8"	1/2"	1/2"	1/2"	1/2"	1-1/4"	0"	1-1/2"
H Hearth Width	44"	44"	40"	40"	36"	36"	45-1/2"	0"	28"
I Hearth Depth	14"	14"	14"	14"	12"	12"	13"	0"	12"

NOTE: All product specifications are subject to change without notice. Always refer to the relevant product manual for full and up-to-date information.