



Features

Ventless design

304 Stainless steel

Fans provide zone heating up to 10'

OUTDOOR / PROUDLY HANDCRAFTED IN NORTH AMERICA

MAHANA
OUTDOOR  SERIES

A WARM BREEZE

MAHANA CONTEMPORARY

PL42VO
PL60VO

VENTLESS
OUTDOOR

QUICK DIMENSIONS

	PL42VO		PL60VO	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	43 $\frac{3}{8}$	42	67 $\frac{3}{8}$	66
B.WIDTH	41 $\frac{5}{8}$	42	65 $\frac{5}{8}$	66
HEIGHT	28 $\frac{7}{8}$	27 $\frac{1}{4}$	28 $\frac{7}{8}$	27 $\frac{1}{4}$
DEPTH	13	11 $\frac{5}{8}$	13	11 $\frac{5}{8}$
VIEWING	37 $\frac{1}{4}$ x 14 $\frac{1}{8}$		61 $\frac{1}{4}$ x 14 $\frac{1}{8}$	

Standard

Concealed burner with Quartz firebeads

Built in fan system

Safety screen

Options

LED backlighting

Stainless steel and powdercoated enclosures

Enclosure pedestal

Enclosure cover

Speckled stones, driftwood, glass media


Remote control on/off



CARBON
RAL 9005

GRAPHITE
RAL 7015

DUNE
RAL 9002

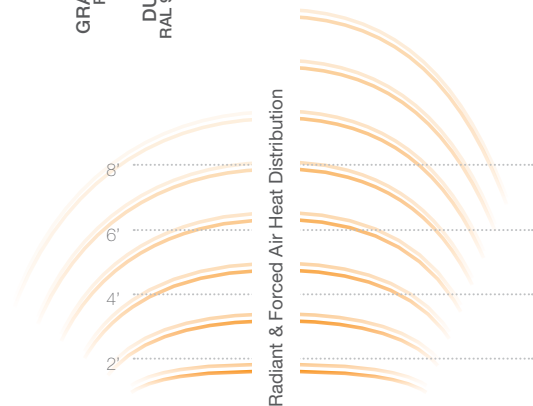

Radiant & Forced Air Heat Distribution

BTU LISTING

PL42VO* / 28,000


PL60VO* / 47,000

PL42VO

PL60VO



MAHANA DIMENSIONS

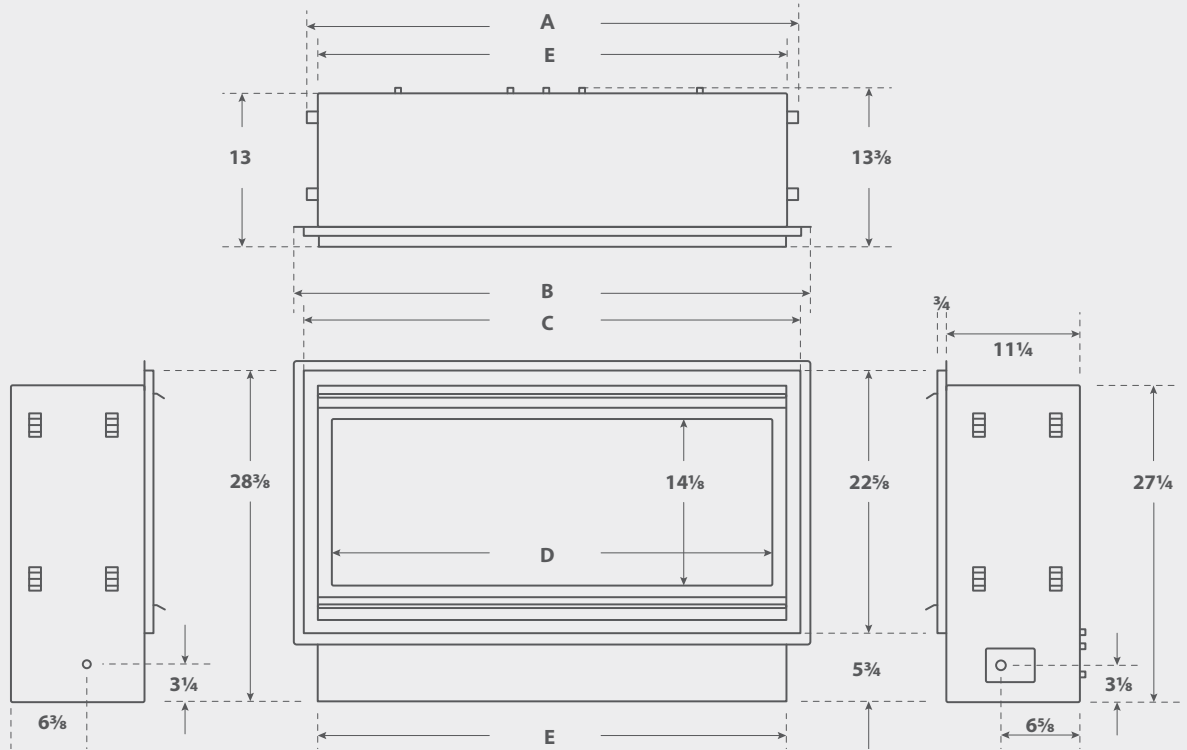

	A	B	C	D	E
PL42VO	41 1/8	43 3/8	42	37 1/4	39 3/4
PL60VO	65 5/8	67 7/8	66	61 1/4	63 3/4

For enclosure dimensions please reference framing dimensions page



MONTIGO / MAHANA / PL60VO / QUARTZ FIREBEADS /



OPTIONS & FEATURES



Unit Specifications

ICON LEGEND

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED

◊

STANDARD

°

	BTU NATURAL GAS	BTU LIQUID PROPANE	CLEARANCE TOP	CLEARANCE SIDES	CLEARANCE BACK	CLEARANCE FLOOR	STANDARD MEDIA	FRONT GLASS TYPE	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
H34VO**	26,000	26,000	9	1†	1†	0	TRADITIONAL	HIGH TEMPERATURE	-	-	-	-	-
H38VO**	34,000	34,000	9	1†	1†	0	TRADITIONAL	HIGH TEMPERATURE	-	-	-	-	-
HL38VO**	34,000	34,000	9	1†	1†	0	HW1157	HIGH TEMPERATURE	-	-	-	-	-
H38SVO**	34,000	34,000	36	12	N/A	0	TRADITIONAL	HIGH TEMPERATURE	-	-	-	-	-
HL38SVO**	34,000	34,000	36	12	N/A	0	HW1157	HIGH TEMPERATURE	-	-	-	-	-
H42VO**	40,000	40,000	9	1†	1†	0	TRADITIONAL	HIGH TEMPERATURE	-	-	-	-	-
PL42VO*	28,000	28,000	0	1	0	0	HW1106	HIGH TEMPERATURE	-	-	◊	+	-
PL60VO*	47,000	47,000	0	1	0	0	HW1106	HIGH TEMPERATURE	-	-	◊	+	-

†Clearance to insulation jacket is 0"

DIVINE OUTDOOR FRAMING

	A	B	C	D	E	F	G	H
H34VO	38¾	35⅝	20¼†	*	61⅞	35⅝	0	43⅝
H38VO	42½	39¼	21⅝†	*	65⅞	39¼	0	49⅞
H42VO	46½	43½	22⅝†	*	72¼	43½	0	51⅞


DIVINE OUTDOOR ST FRAMING

	A	B	C	D
H38SVO	38	41	23⅞	*


MAHANA FRAMING AND ENCLOSURE

	A	B	C	D	E	F	G	H	I	J
PL42VO	27¼	42	11⅝	*	62⅞	42	0	48⅞	51⅞	34⅝
PL60VO	27¼	66	11⅝	*	87	66	0	65½	76⅞	34⅝

MAHANA ENCLOSURE

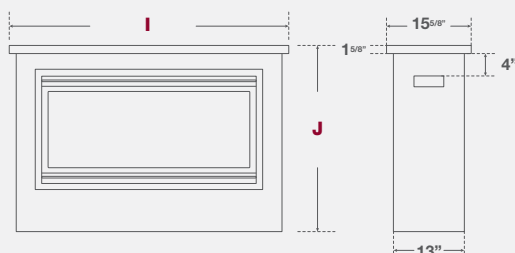

DIVINE OUTDOOR ST ENCLOSURE

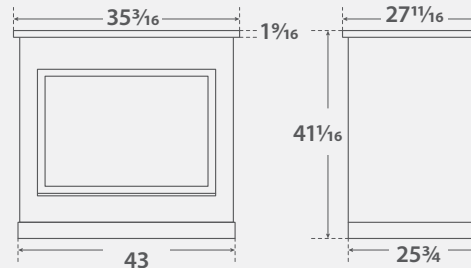


See instruction manual for detailed instructions

Be sure to plan a drain system for both in the wall and standalone installations.

*Check local codes and manual for minimum distance from grade to unit.

†Dimension is to back wall or back studs

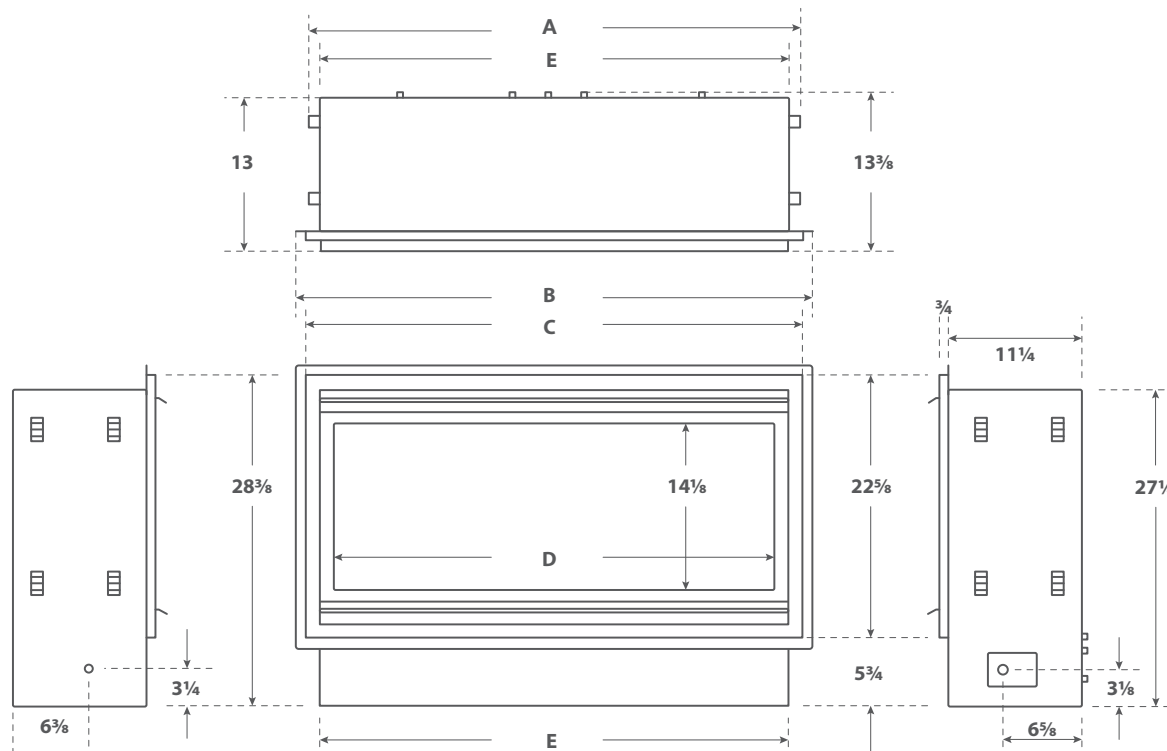

	A	B	C	D	E
PL42VO	41 $\frac{1}{8}$	43 $\frac{3}{8}$	42	37 $\frac{1}{4}$	39 $\frac{3}{4}$
PL60VO	65 $\frac{5}{8}$	67 $\frac{7}{8}$	66	61 $\frac{1}{4}$	63 $\frac{3}{4}$

PL42VO
PL60VO
 Outdoor

UNLESS OTHERWISE SPECIFIED	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/8"$	03/20/2023

MONTIGO[®]
 the art of **fireplaces**
www.montigo.com