


ASCENT™ LINEAR SERIES 36-1 DIRECT VENT GAS FIREPLACE



Specifications

Model	BTU	Width		Height		Depth		Viewing Area
		Actual	Framing	Actual	Framing	Actual	Framing	
BL36-1	17,500 (NG) 16,000 (P)	35 15/16	36 1/2	39 1/16	39 3/8	15 3/4	16	16 3/4 x 30 3/4


Front Options

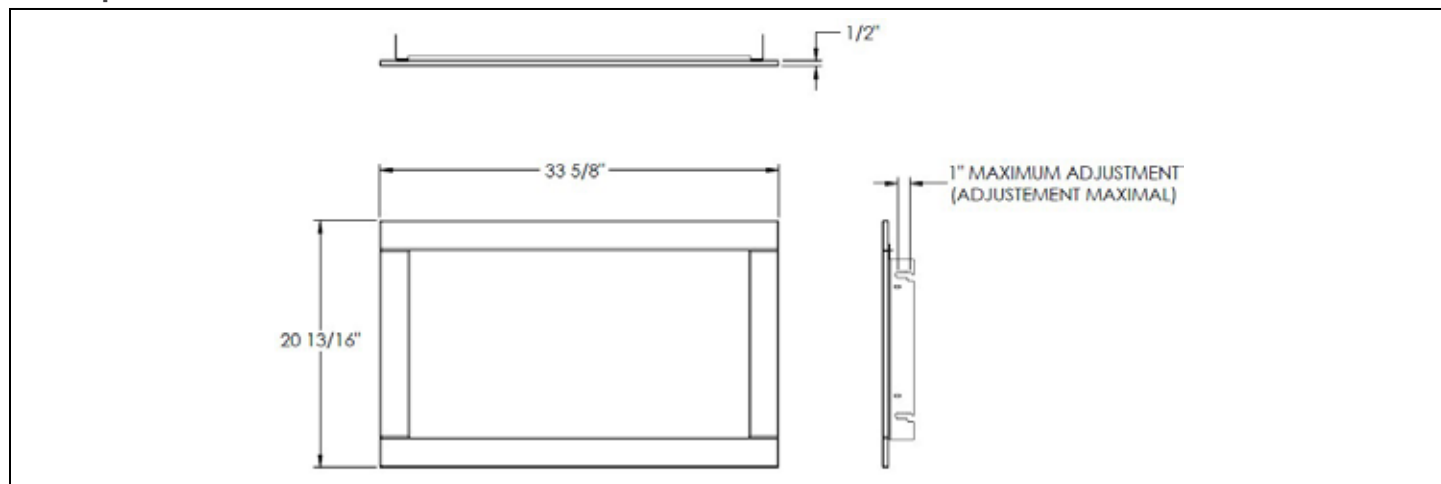

Framing


! WARNING

- Do not build into this area - it must be left clear to provide adequate clearance for the vent in this 14" (35.6cm) wide area centered along the front of the appliance. The appliance should be in its final location before framing.

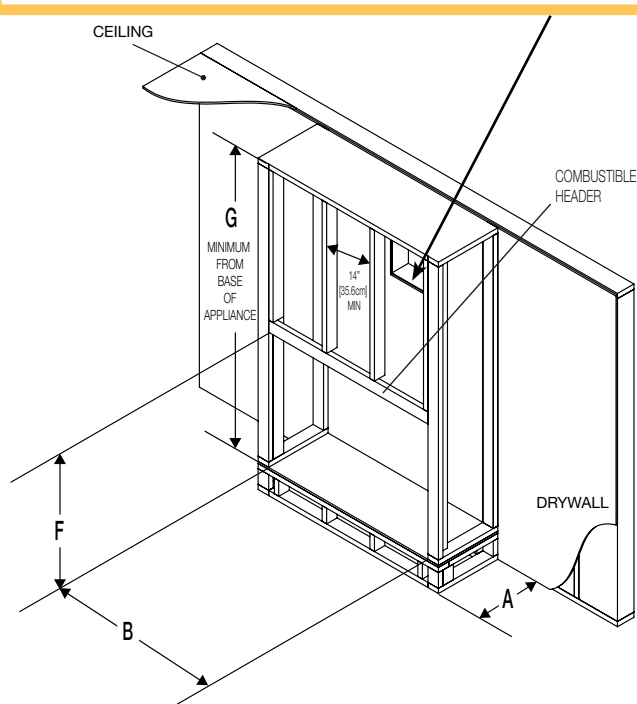


B	36 1/2" (92.7cm)
F	39 3/8" (100cm)
A	16" (40.6cm)
G	56" (142.2cm)

H	84" (213cm)
J	3 1/2" (89cm)

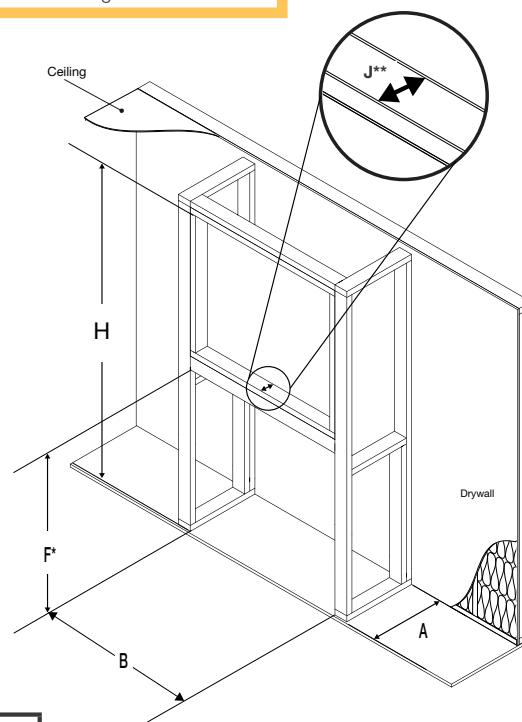

* Allow for finished floor and hearth thickness when setting these dimensions.
 ** 2" x 4" frame can be "backed" with 3/4" ply to support TV mounting hardware.

Dimensions

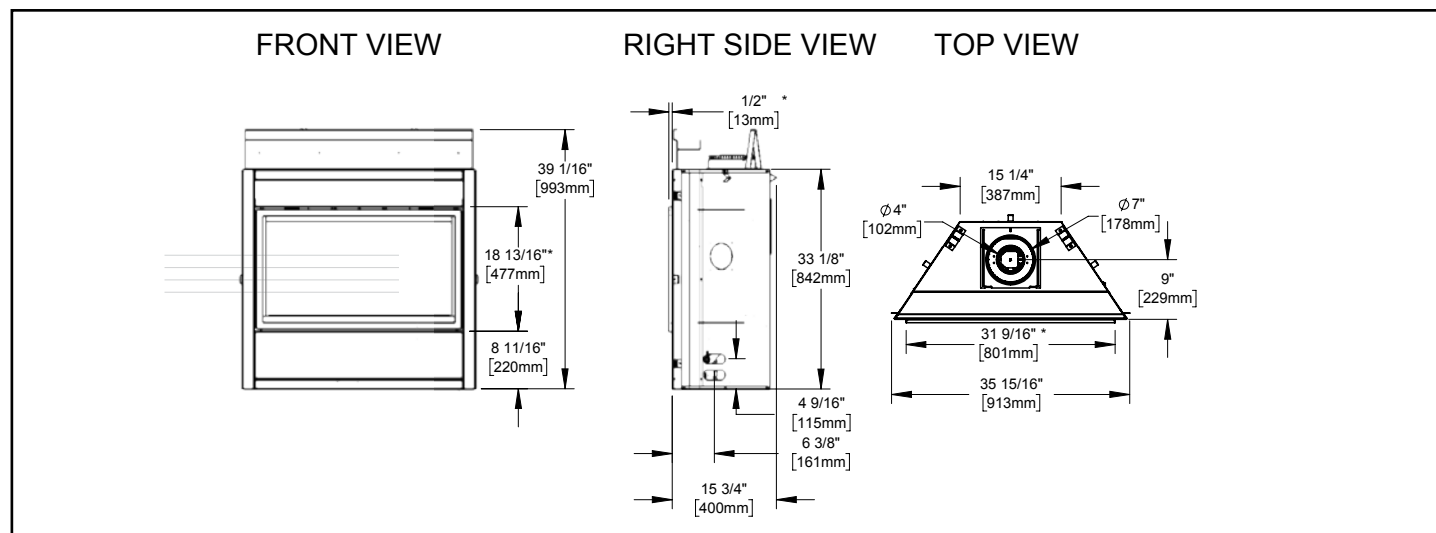

note:

The vent shield is telescopic and must be adjusted to shield the full depth of the combustible wall penetration.

* See "venting requirements" and "venting installation" sections.
** Clearances within the enclosure may be higher, see "minimum framing dimensions" section

Combustible mantel clearance can vary according to the mantel depth. Use the graph to help evaluate the clearance needed.

Appliance Opening

Hood

MANTLE DIMENSIONS

Ref	Height	Depth
A	27 1/2" (69.9cm)	N/A
B	12" (30.5cm)	2" (51mm)
C	14" (35.6cm)	4" (102mm)
D	16" (40.6cm)	6" (152mm)
E	18" (45.7cm)	8" (203mm)

For more information about the Universal Heat Management System, see installation manual.

The diagram shows the side wall and front view of the oven. The side wall view includes dimensions A (width of the door), B (height of the door), C (width of the upper cabinet), D (width of the lower cabinet), E (height of the lower cabinet), and F (height of the upper cabinet). The front view shows the oven door with a warning: "Do not put objects in front of the appliance (minimum distance of 4 feet)".

A	16" (40.6cm)
B	36 1/2" (92.7cm)
C	35" (89cm)

D	6 5/16" (16cm)
E	49 9/16" (125.8cm)
F	6" (15.2cm)

W415-3130 / 10.07.22


ASCENT™ LINEAR SERIES 42 DIRECT VENT GAS FIREPLACE




Specifications

Model	BTU	Width		Height		Depth		Glass
		Actual	Framing	Actual	Framing	Actual	Framing	
BL42	20,000	42	42 1/2	38 3/16	39 3/8	18 5/16	18 9/16	37 1/2 x 16 3/4


Dimensions

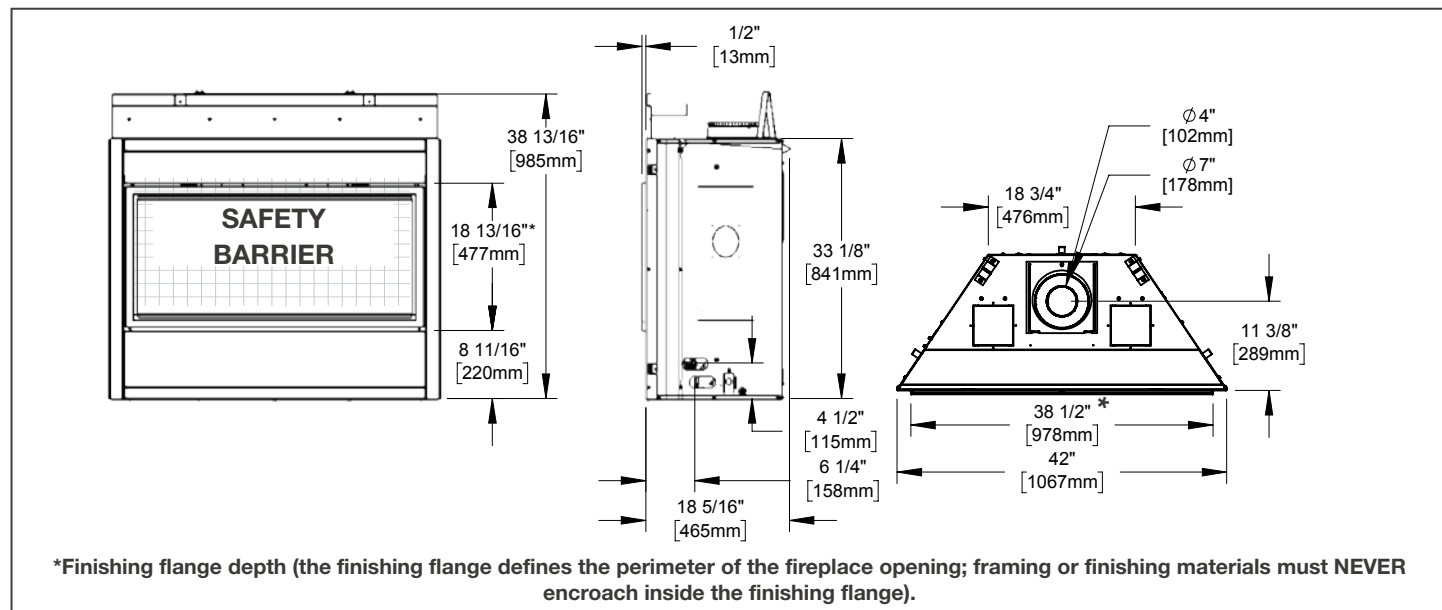

Appliance Location

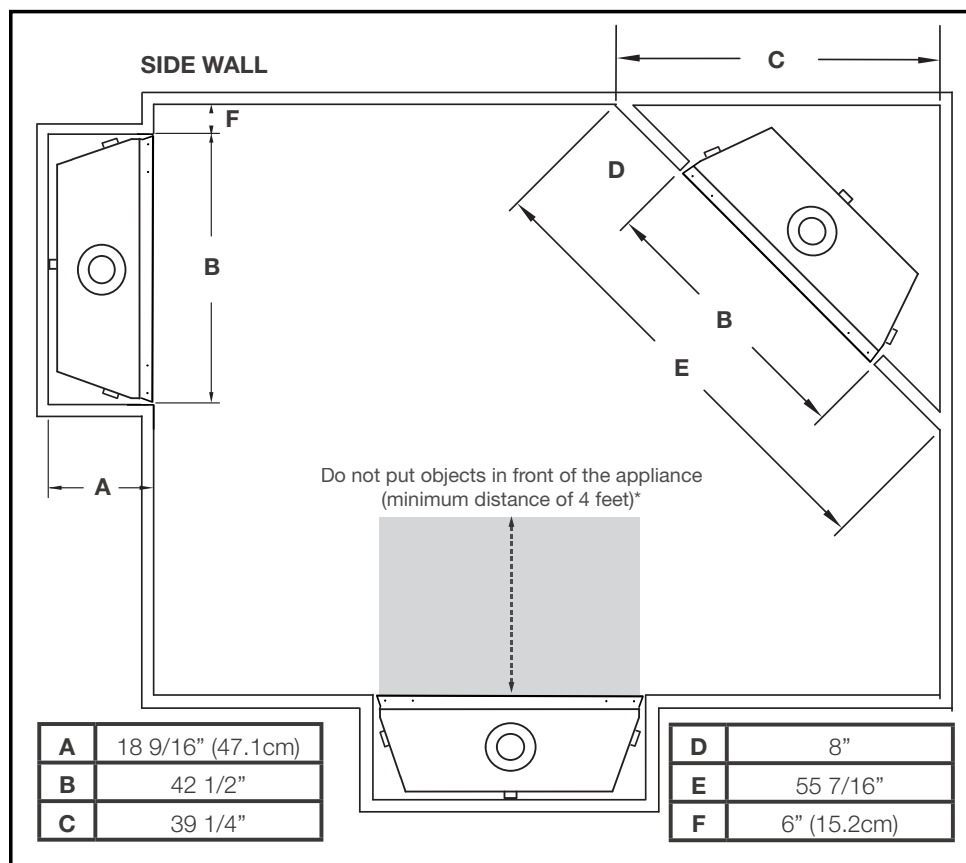

Combustible Mantel Clearances

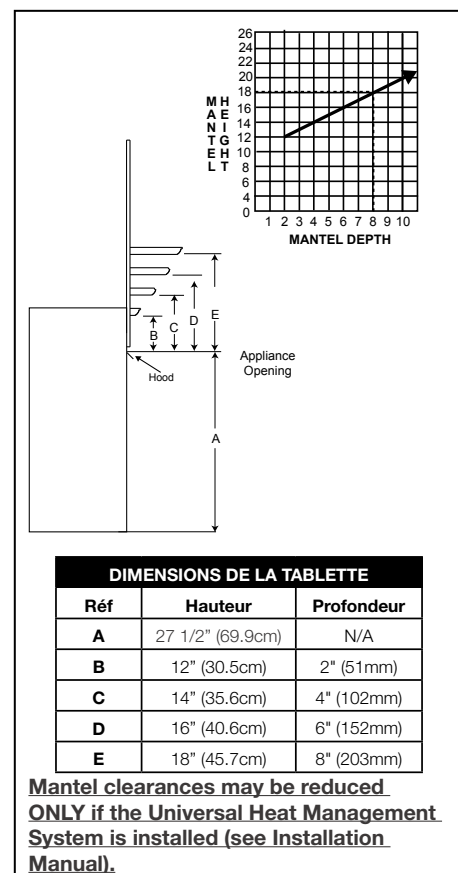


W415-3065 / A / 10.07.22

ASCENT™ LINEAR SERIES 42 DIRECT VENT GAS FIREPLACE



Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.



Wall Penetration

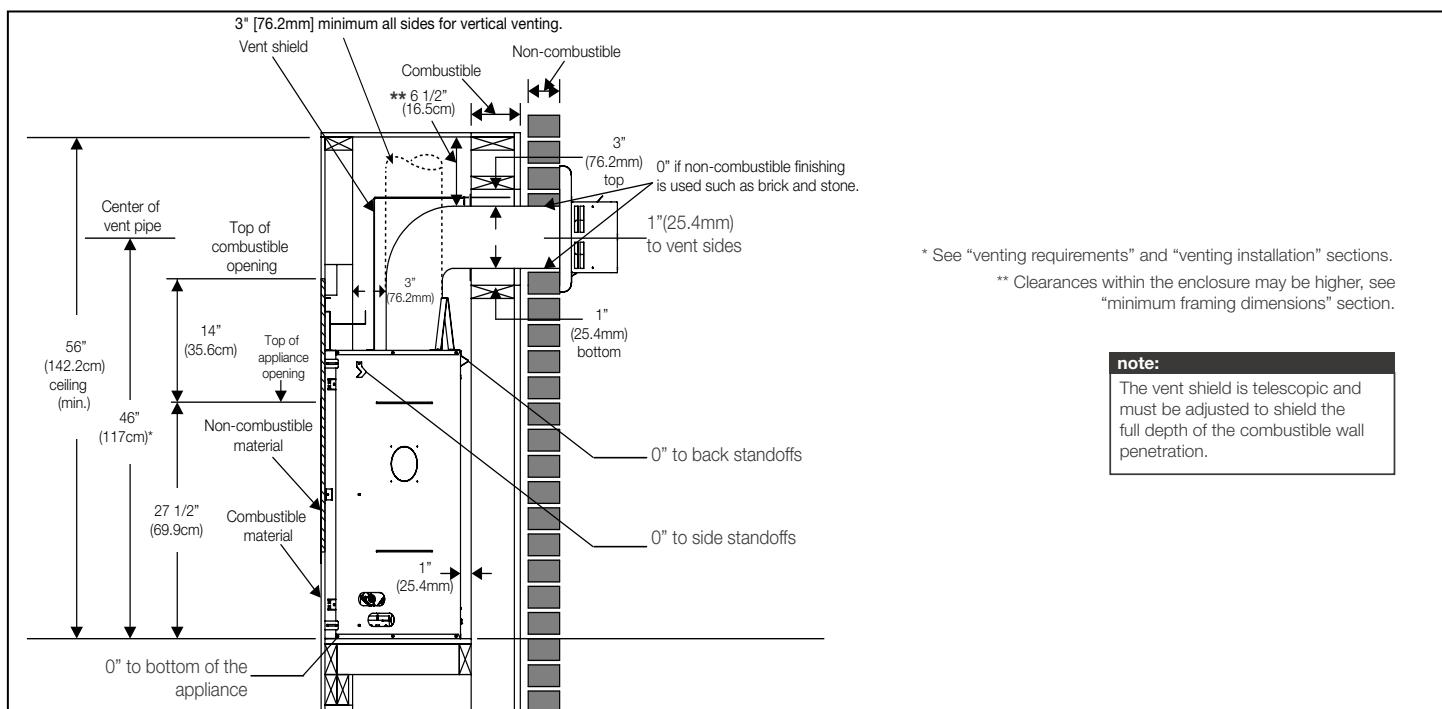

Framing

⚠ WARNING

- Do not build into this area - it must be left clear to provide adequate clearance for the vent in this 14" (35.6cm) wide area centered along the front of the appliance. The appliance should be in its final location before framing.

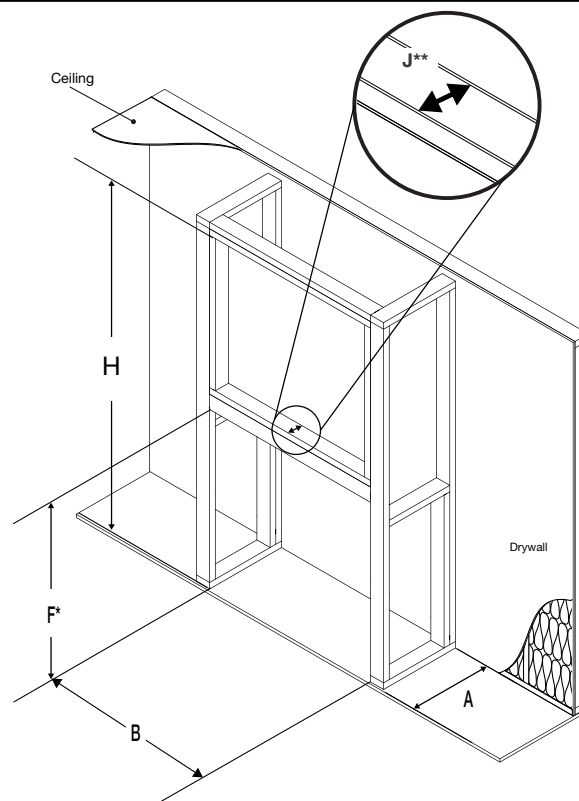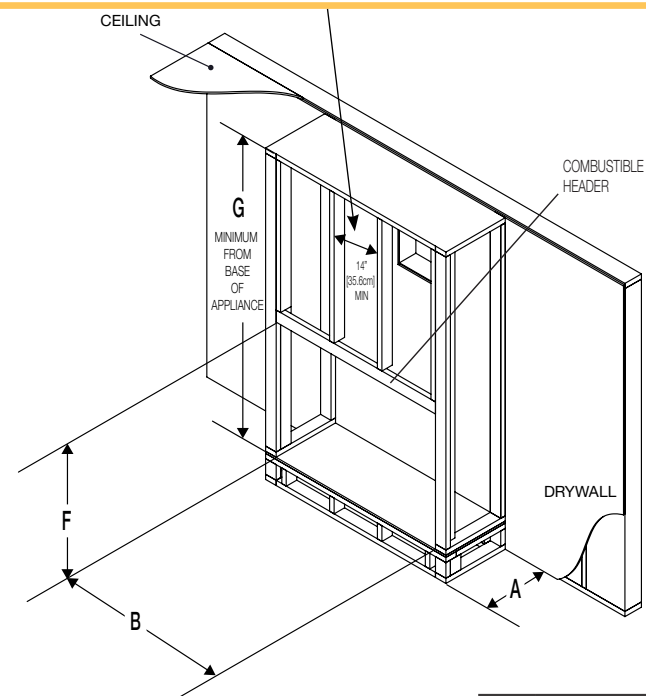

B	42 1/2" (107.9cm)
F	39 3/8" (100cm)
A	18 9/16" (47.1cm)
G	56" (142.2cm)

H	84" (213cm)
J	3 1/2" (89mm)

* Allow for finished floor and hearth thickness when setting these dimensions.

** 2" x 4" frame can be "backed" with 3/4" ply to support TV mounting hardware.

W415-3065 / A / 10.07.22


ASCENT™ LINEAR SERIES 46 DIRECT VENT GAS FIREPLACE




Specifications

Model	BTU	Width		Height		Depth		Viewing Area
		Actual	Framing	Actual	Framing	Actual	Framing	
BL46	24,000	46 7/8	47 3/8	39 1/16	39 3/8	18 5/16	18 9/16	14 1/8 x 39


Dimensions

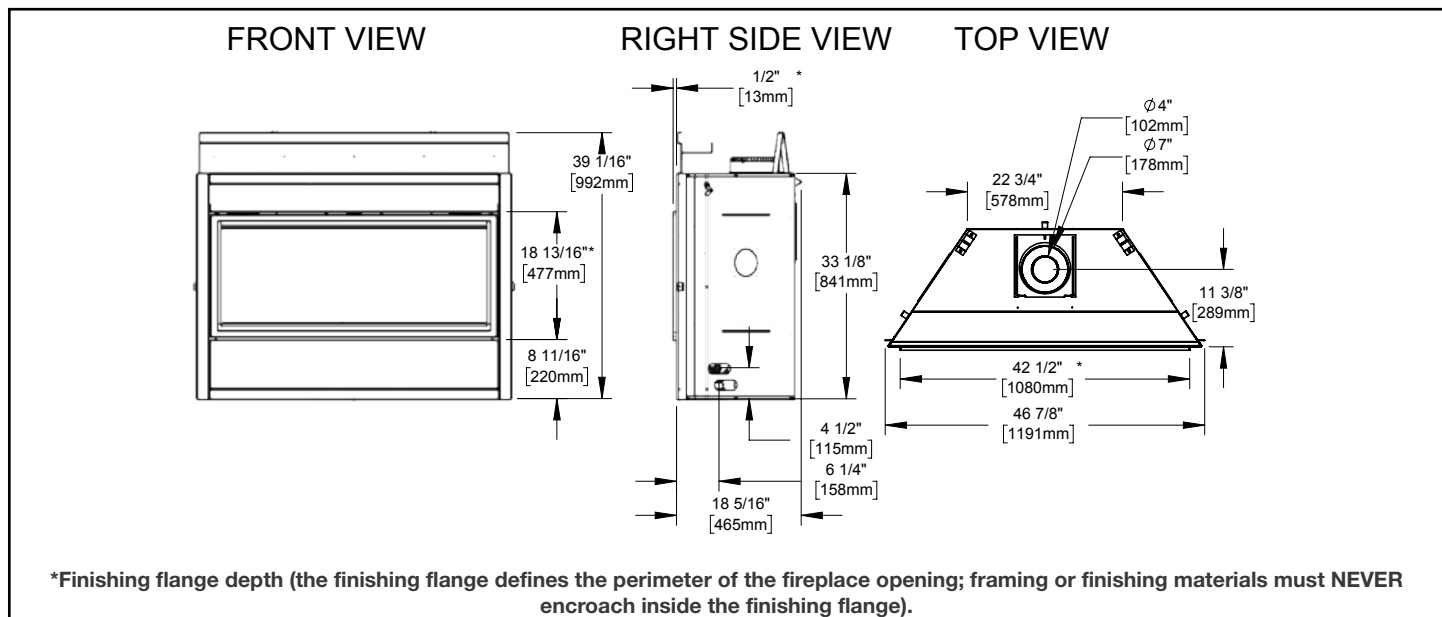

Appliance Location

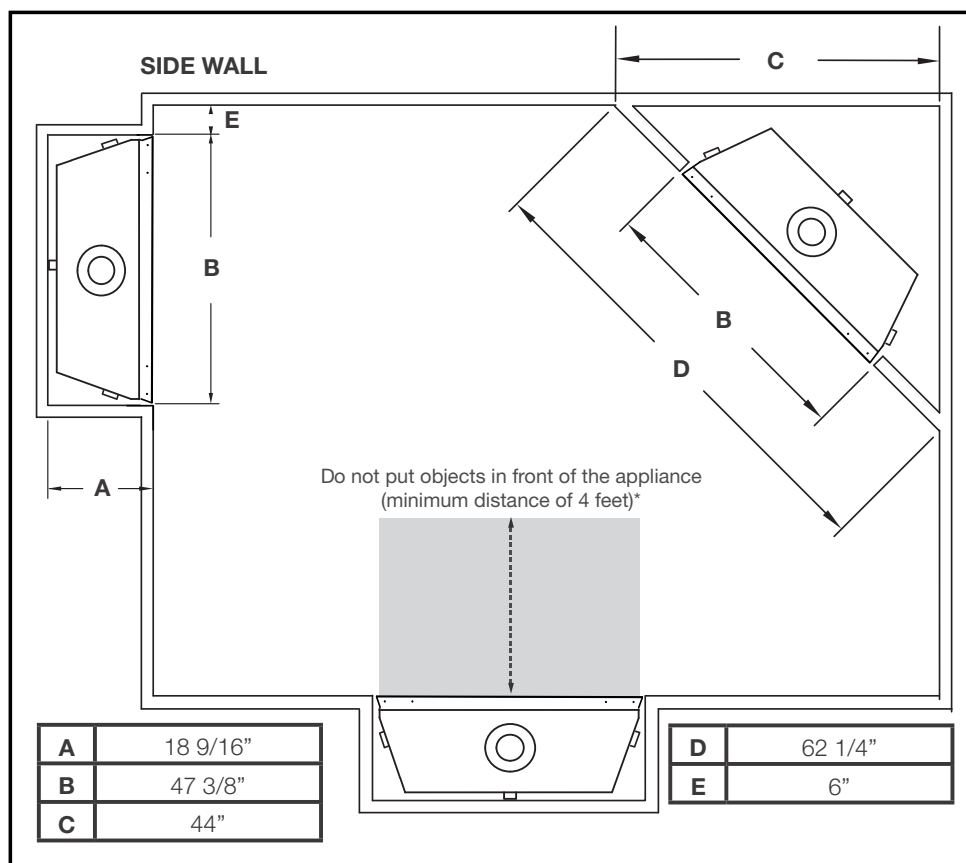

Combustible Mantel Clearances

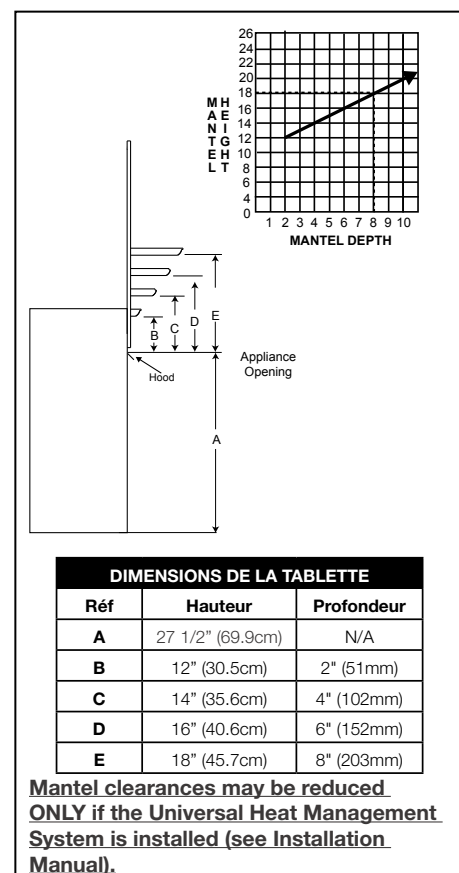


ASCENT™ LINEAR SERIES 46 DIRECT VENT GAS FIREPLACE



Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.


Wall Penetration

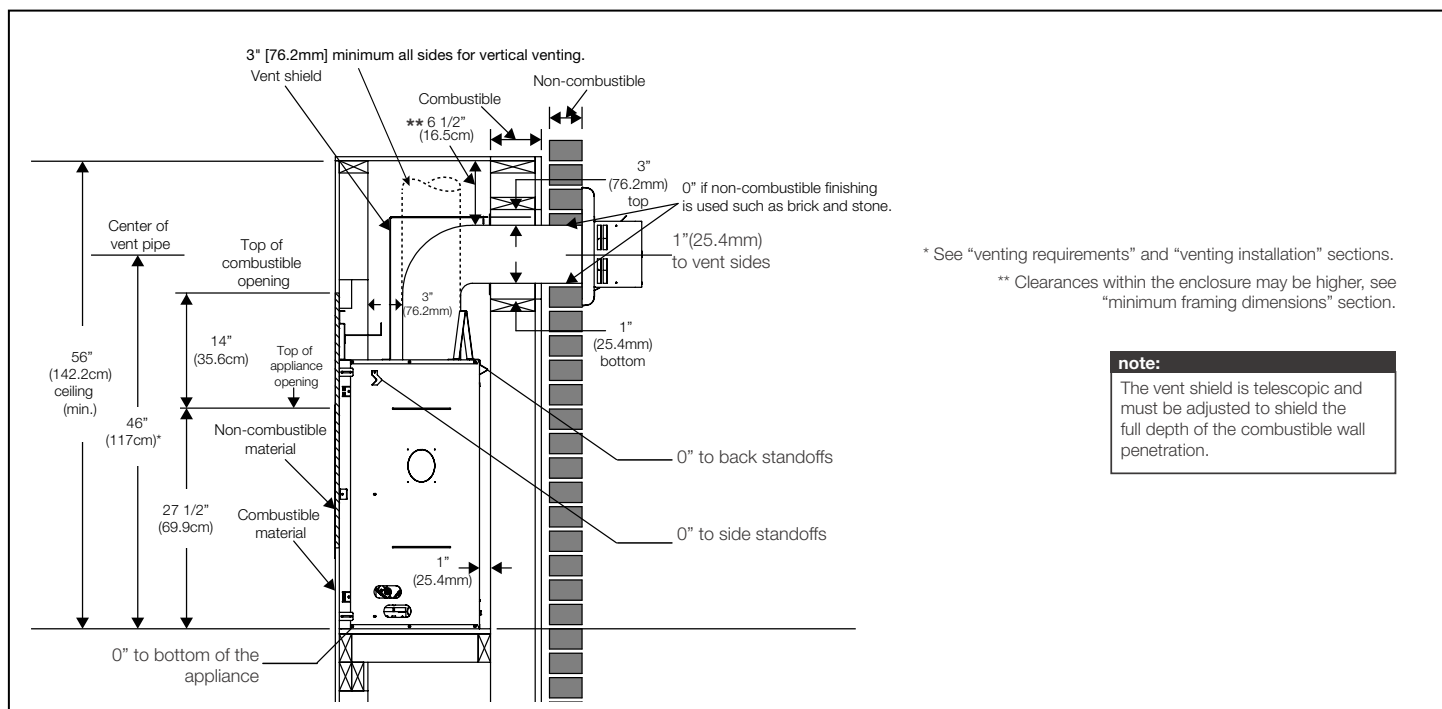

Framing

WARNING

- Do not build into this area - it must be left clear to provide adequate clearance for the vent in this 14" (35.6cm) wide area centered along the front of the appliance. The appliance should be in its final location before framing.

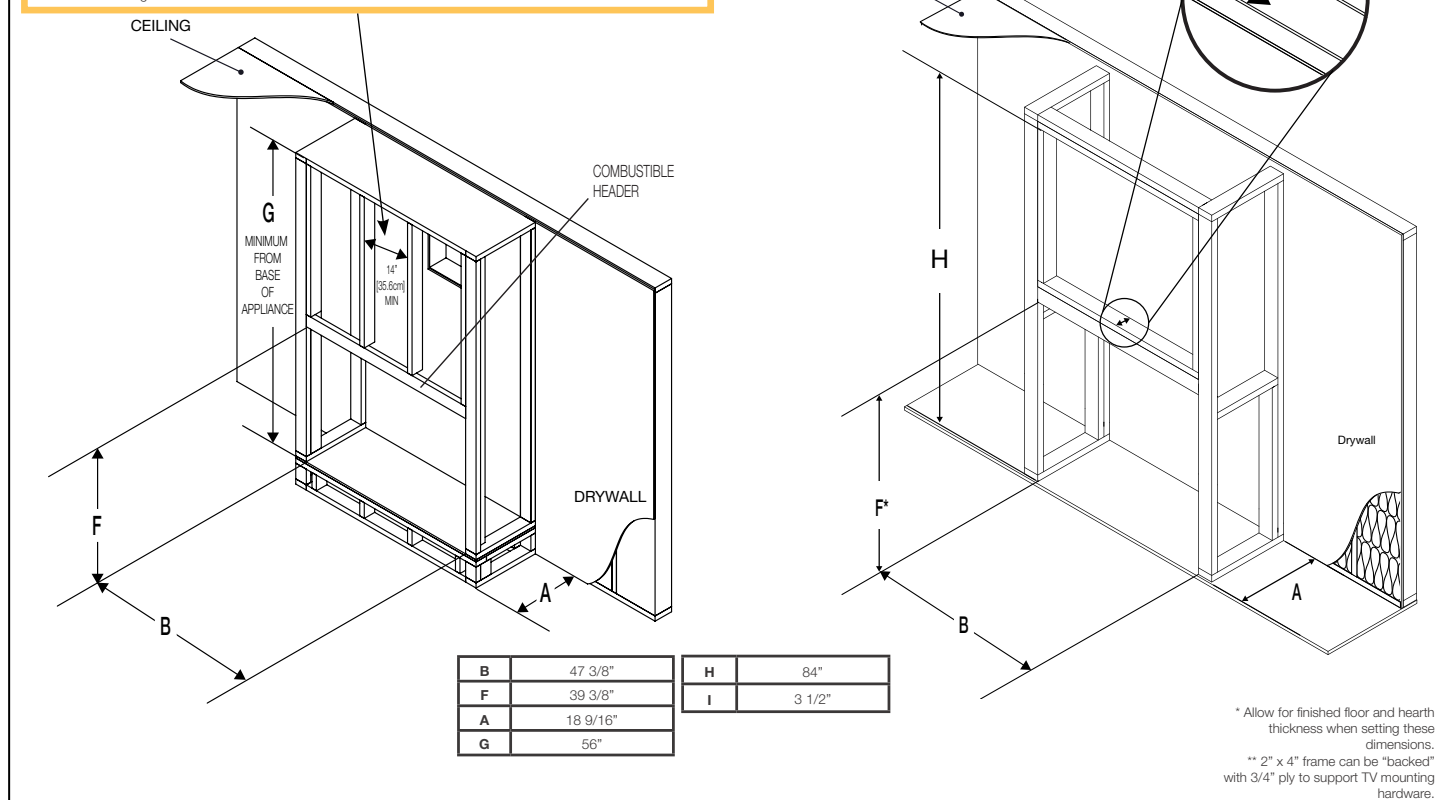

W415-3131 / 10.07.22

Model	BTU	Width		Height		Depth		Glass
		Actual	Framing	Actual	Framing	Actual	Framing	
BL56	28 000 (NG) 26,500 (P)	56	56 1/2	38 13/16	39 3/8	18 5/16	18 9/16	14 1/4 x 49

[illegible]

SIDE WALL

Do not put objects in front of the appliance (minimum distance of 4 feet)*

A	18 9/16" (47.1cm)
B	56 1/2"
C	51"
D	72 1/4"
E	6" (15.2cm)

Diagram illustrating the side profile of the fireplace mantel and the appliance opening. Dimensions B, C, D, and E are indicated with arrows, representing the height of the mantel above the opening. A label 'Hood' points to the top of the appliance opening.

Ref	Height	Depth
B	12" (30.5cm)	2" (51mm)
C	14" (35.6cm)	4" (102mm)
D	16" (40.6cm)	6" (152mm)
E	18" (45.7cm)	8" (203mm)


Mantel clearances may be reduced ONLY if the Universal Heat Management System is installed (see Installation Manual).

ASCENT™ LINEAR SERIES 56 DIRECT VENT GAS FIREPLACE



Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.


Wall Penetration

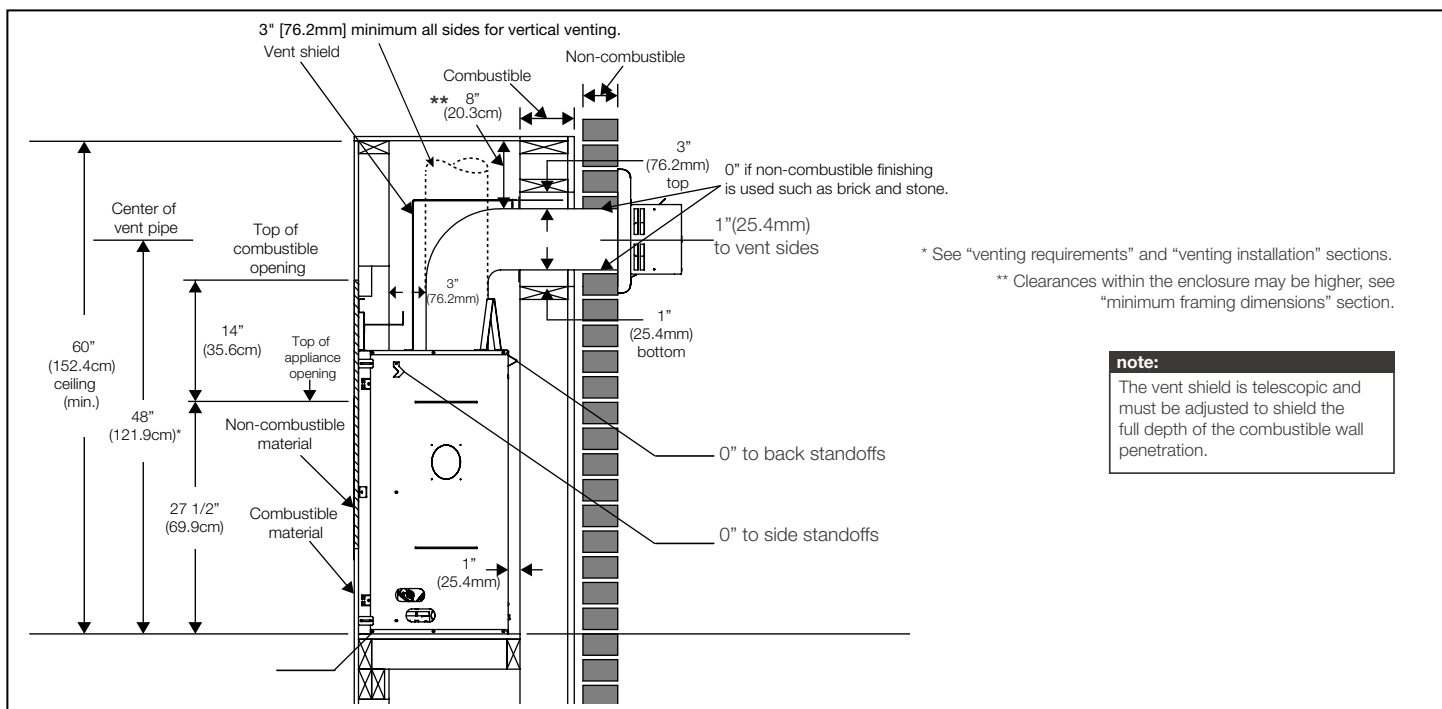

Framing

⚠ WARNING

- Do not build into this area - it must be left clear to provide adequate clearance for the vent in this 14" (35.6cm) wide area centered along the front of the appliance. The appliance should be in its final location before framing.

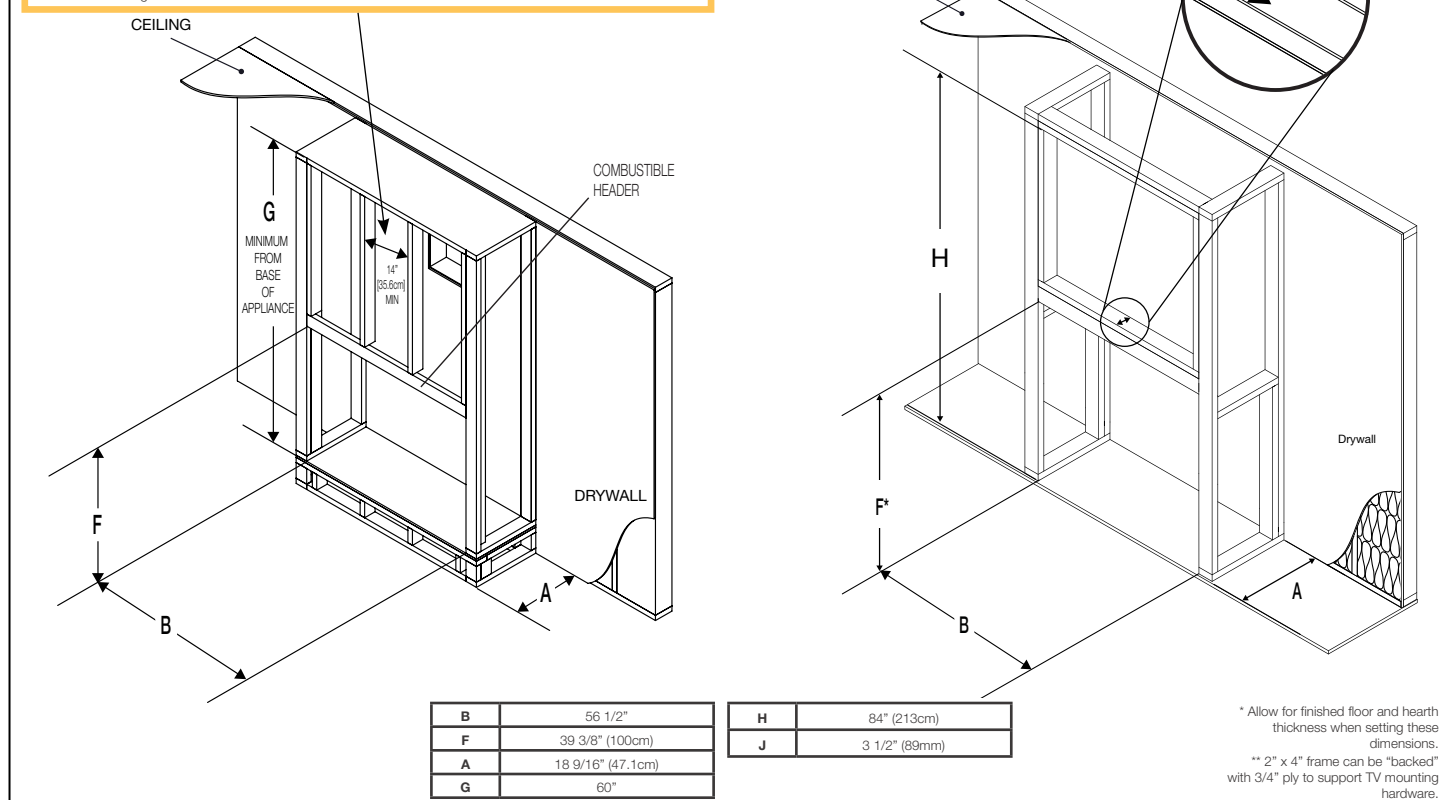

W415-3066 / A / 10.07.22