

# REGENCY GRANDVIEW™ - G1200P

Large Gas Fireplace



# PREMIUM TRADITIONAL FIREPLACE

Experience the stunning flame picture of the G1200 traditional gas fireplace. Featuring our latest burner technology, this split flow infusion burner provides unmatched realism and flame control. Customize with mix-and-match accessories and 3 log set options.

The Grandview G1200 is a beautiful and powerful fireplace that will make any home feel warm and stylish. It's designed to fit perfectly in any room and offers great flexibility with many options to customize its look

## STANDARD FEATURES

- NEW innovative split flow infusion burner that creates the most realistic flame package
- Largest viewing area in its class
- Standard top down and ember-bed lighting
- Integrated Invisimesh safety screen
- Cool Wall system to allow for flexible finishing options
- Flame height adjustment control
- Electronic ignition with Proflame II GTMF remote control
- Natural gas
- Limited lifetime warranty

## OPTIONS

- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Finishing trims for easy finishing around the fireplace
- Variable speed blower (Non-combustible finishing install only) (Outdoor conversion kit required)
- Chase vent (cool wall installations)
- Propane conversion kit
- Outdoor conversion kit



G1200P - Oak log set with herringbone brick panels



G1200P - Birch logs with volcanic black brick panels



G1200P - Driftwood logs, volcanic stones and reflective black glass panels

SPECIFICATIONS	NATURAL GAS	PROPANE
Max. Input (BTU)	53,000	53,000
Turn down to (BTU)	13,500	13,500
Efficiency (steady state)	72.58%	74.08%
EnerGuide Rating (Canada only)	66.58%	67.96%

DIMENSIONS	
Width	55"
Height	42-3/4"
Depth	28-7/8"
Glass Viewing Area	1200 sq. in.



# REGENCY GRANDVIEW™ - G800EC • G800C • G800EH

Medium Gas Fireplaces



## YOUR FIREPLACE, YOUR WAY

Select your breathtaking flame picture and accessories to craft a truly unique fireplace. With our patented Cool Wall technology, the Regency Grandview™ G800 is the first of our Grandview™ series of gas fireplaces designed to maximize choice and customization.

### STANDARD FEATURES

- Clean front design
- Largest viewing area in its class
- Top down and ember-bed lighting (G800EC/G800EH)
- Integrated safety screen
- Ceramic glass
- Standing Pilot (Direct Spark Ignition - G800C) (US Only)
- Flame height adjustment control
- Proflame II GTMF remote control (G800EC, G800EH only)
- Electronic ignition (G800EC, G800EH only)
- Rear or top vent for versatile installations (G800EC, G800C only)
- Natural gas
- Limited lifetime warranty

### OPTIONS

- Choose from a log grate and traditional style log package or contemporary crystal tray
- Cool Wall system
- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- Inner painted black steel panels
- Surrounds in various colors
- Finishing trims for easy finishing around the fireplace
- Variable speed blower (Outdoor conversion kit required)
- Chase vent (cool wall installations)
- Propane conversion kit
- ON/OFF remote control (G800C) (US Only)
- AstroCap® venting system
- Outdoor conversion kit



G800EH - Birch log set and castlestone brick panels



G800EC/G800C - Iceberg crushed glass, volcanic stones and black steel panels



G800EC/G800C - Oak log set and herringbone brick panels



G800EC/G800C - Iceberg crushed glass, black steel panels and black faceplate



G800EC/G800C - Birch log set with brown brick panels and antique copper faceplate



G800EH - Driftwood log set and volcanic black brick panels and brushed nickel faceplate

SPECIFICATIONS	G800EC		G800C		G800EH	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	27,000	25,500	27,000	26,500	36,000	34,000
Turn down to (BTU)	15,000	21,000	15,000	14,500	19,500	27,000
Efficiency (steady state)	65.20%	68.16%	61.12%	63.62%	65.20%	68.16%
EnerGuide Rating (Canada only)	55.96%	57.74%	55.96%	55.03%	58.73%	57.94%

DIMENSIONS	
Width	35-7/8"
Height	33-7/8"
Depth	16-7/8"
Viewing Area	800 sq. in.



# REGENCY GRANDVIEW™ - G600EC • G600C

Small Gas Fireplaces



## SMALL FIREPLACE, BIG FLAME

This Regency Grandview™ G600 encapsulates the entire series' customization and flexibility in a more compact size.

Ideal for smaller spaces or zone heating, this unit makes a bold impact.

### STANDARD FEATURES

- Clean front design
- Top down and ember-bed lighting (G600EC)
- Integrated safety screen
- Ceramic glass
- Flame height adjustment control
- Standing Pilot (Direct Spark Ignition - G600C) (US Only)
- Proflame II GTMF remote control (G600EC)
- Electronic ignition (G600EC)
- Rear or top vent for versatile installations
- Natural gas
- Limited lifetime warranty

### OPTIONS

- Choose from a log grate and traditional style log package or contemporary crystal tray
- Cool Wall system to allow for any finishing material right to the edge of the fireplace
- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- Inner painted black steel panels
- Surrounds in various colors
- Finishing trims for easy finishing around the fireplace
- Variable speed blower (Outdoor conversion kit required)
- Chase vent (cool wall installations)
- Propane conversion kit
- ON/OFF remote control (G600C) (US Only)
- AstroCap® venting system
- Outdoor conversion kit



G600EC/G600C - Oak log set and rustic brown brick panels



G600EC/G600C - Oak log set and castlestone brick panels



G600EC/G600C - Birch log set, herringbone brick panels and black faceplate



G600EC/G600C - Ginger crushed glass and antique copper faceplate



G600EC/G600C - Iceberg crushed glass, volcanic stones and brushed nickel faceplate



G600EC/G600C - Driftwood log set and black steel panels

#### SPECIFICATIONS

	G600EC		G600C	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	21,000	20,500	21,000	20,500
Turn down to (BTU)	11,500	16,500	11,500	11,000
Efficiency (steady state)	71.17%	72.80%	71.18%	72.71%
EnerGuide Rating (Canada only)	64.80%	67.22%	64.79%	66.76%

#### DIMENSIONS

Width	31-7/8"
Height	29-7/8"
Depth	14-5/8"
Viewing Area	600 sq. in.

# OPTIONS & ACCESSORIES FOR GRANDVIEW

## CHOOSE YOUR LOOK



○ INTERIOR PANEL

○ INTERIOR OPTION

○ FRONT OPTION (G600 AND G800)

## MULTIPLE INTERIOR PANELS



Rustic Brown Brick Panels



Herringbone - Rustic Brown Brick Panels



Volcanic Black Brick Panels



Castlestone Grey (available for G600 & G800 series only)



Painted Black Steel Panels



Black Enamel Reflective Panels

## MULTIPLE INTERIOR OPTIONS



Birch Log Set



Oak Log Set



Driftwood Log Set

## G800 / G600



Crushed Glass - Ginger



Crushed Glass - Coal Black



Crushed Glass - Iceberg



Volcanic Stones

## MULTIPLE FRONT OPTIONS G800 / G600



Clean Front Finishing Trim



Outside Finishing Trim



Faceplate

### FACEPLATE AVAILABLE IN THREE COLORS:



Black



Brushed Nickel



Antique Copper


# GRANDVIEW SERIES INSTALLATION

## Location


For the purposes of this installation manual the term "outdoor" means installed outside of the insulated building envelope within a weatherproof enclosure or existing solid-fuel burning fireplace having a minimum required overhang. The outdoor space may be attached or free standing to the main/primary structure and may or may not include walls.

## Note

The fireplace will not perform as an exterior wall. If installed against an exterior wall we recommend the appliance enclosure or chase be constructed completely outside of the insulated building envelope and weather membrane. The fireplace must be permanently situated and connected to a fixed piping system, it is not portable.

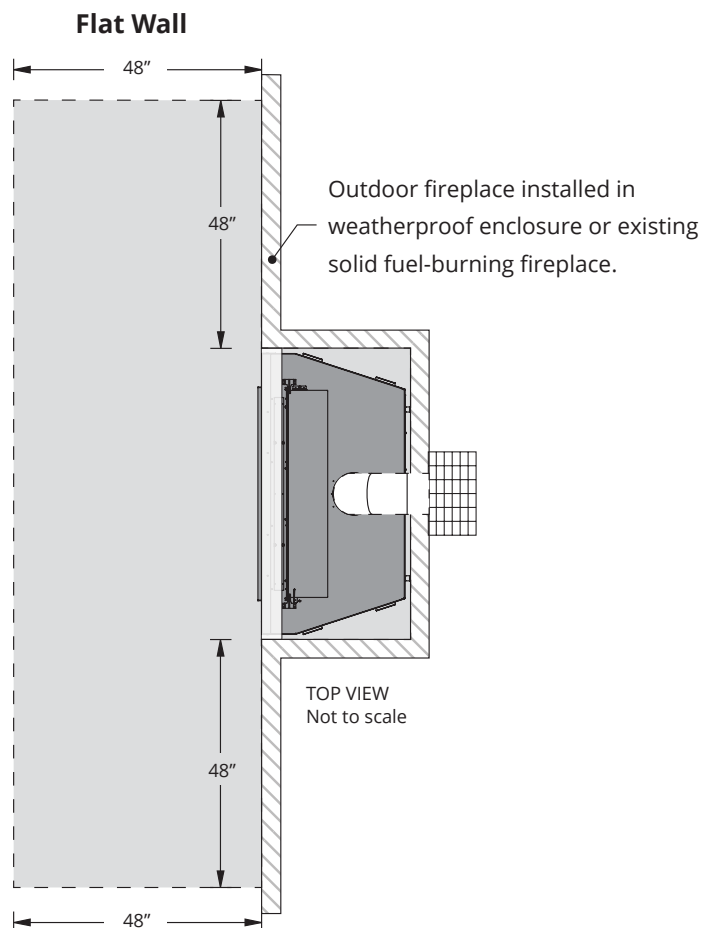


The minimum weatherproof overhang in front and at sides of the fireplace is 1/2 of the height of the overhang (as shown with 96" framing height) measured from the base of the unit.

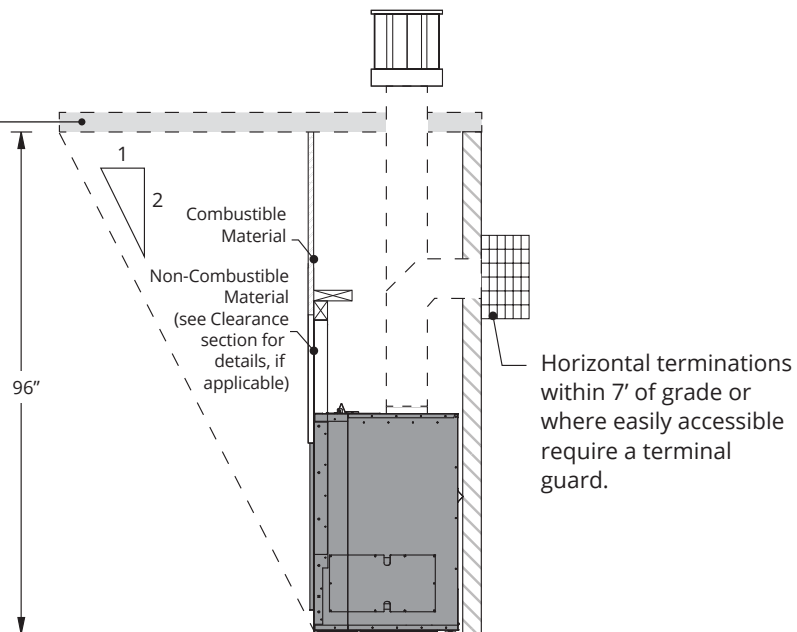




## INSTALLATION OPTIONS - G1200P, G800EH, G800EC, G800C

### Non-Combustible Finishing Install




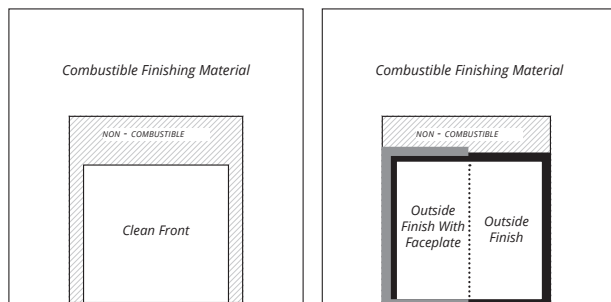


### Combustible Finishing Install with Cool Wall

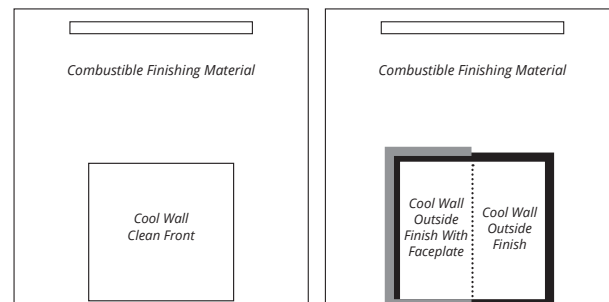

OPTIONS	G800EC	G800C	G800EH	G1200P
Cool Wall Option	Optional	Optional	Optional	Optional
Min. Cool Wall Opening	66 sq. in.	66 sq. in.	107 sq. in.	180 sq. in.
Min. Enclosure Ceiling	80" Cool Wall or 62" non-Cool Wall	80" Cool Wall or 62" non-Cool Wall	84" Cool Wall or non-Cool Wall	88" Cool Wall or 96" non-Cool Wall

## DIMENSIONS - G1200P

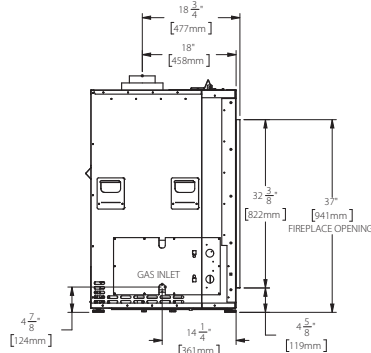
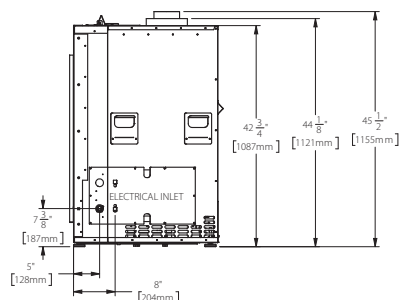
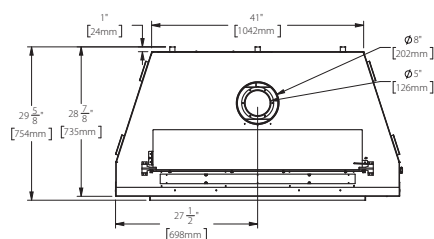
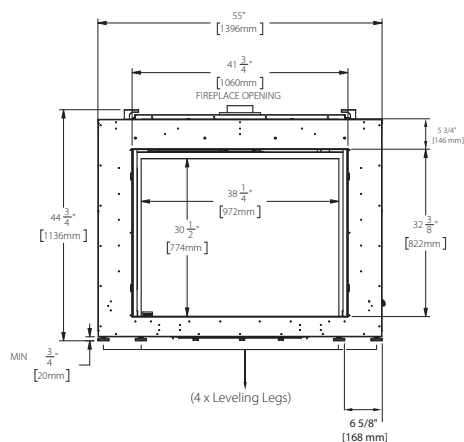


For installation, framing and clearances see manuals on our website: [www.regency-fire.com](http://www.regency-fire.com)





NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

# SPECIFICATIONS

## DIMENSIONS - G800EC, G800C

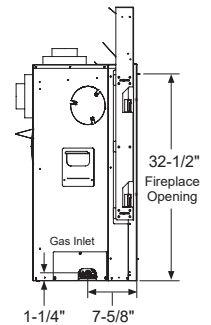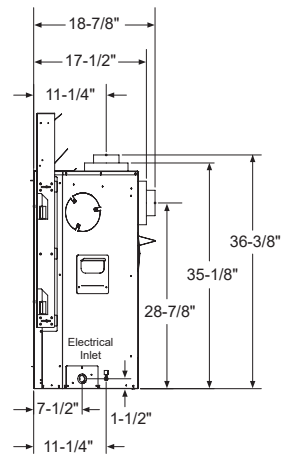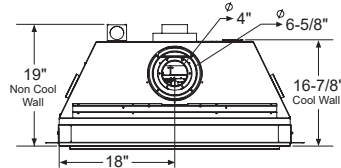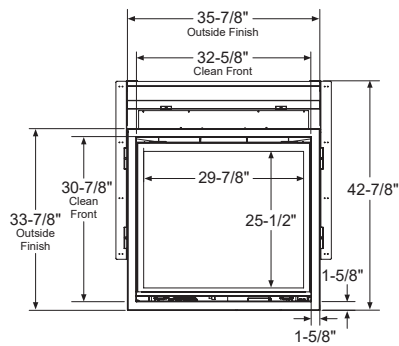

## DIMENSIONS - G800EH

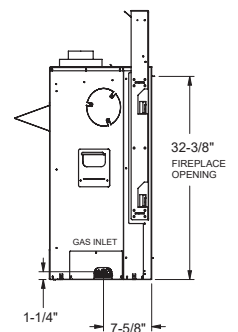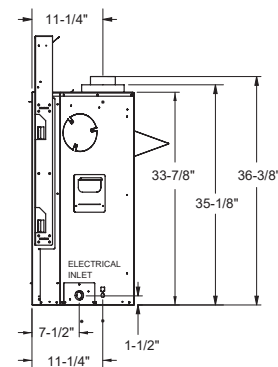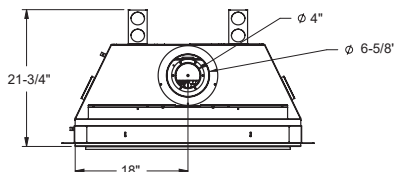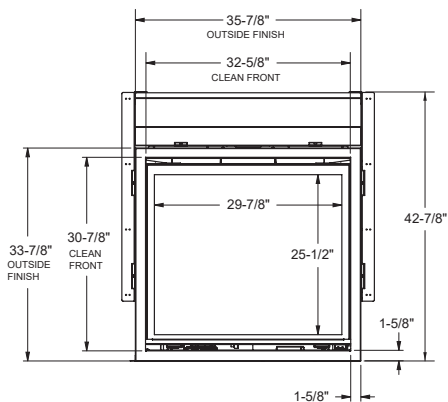

## DIMENSIONS - G600EC, G600C

