
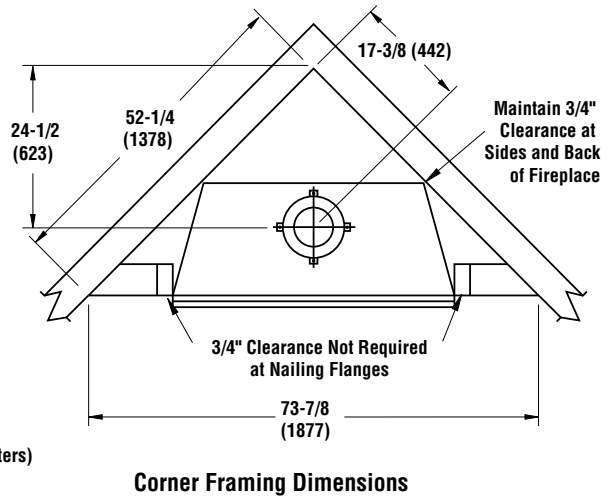





WRE3036 SERIES

OUTDOOR WOOD-BURNING FIREPLACES

Framing Dimensions

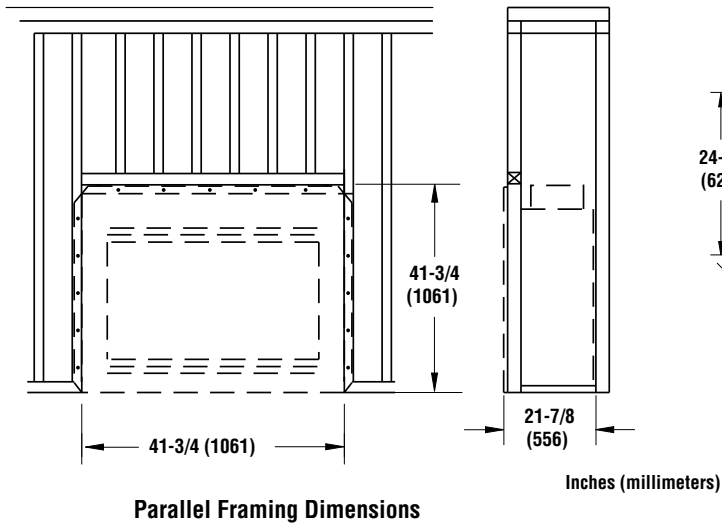

Fireplace Dimensions

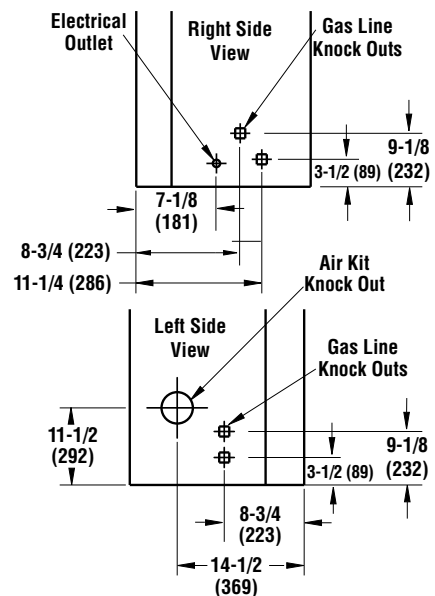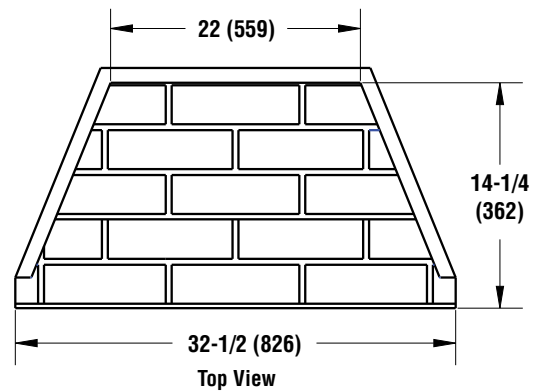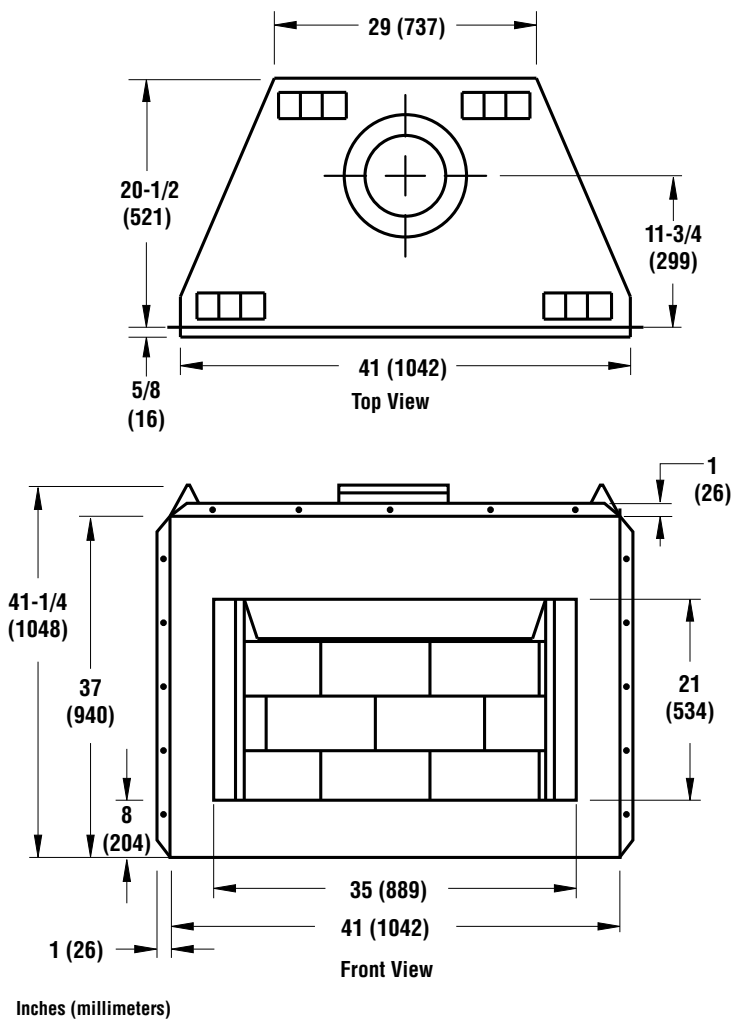

WRE3036 SERIES

Product Information

Product Reference Information			
Cat. No.	Model	Shipping Weight	Shipping Volume
F0449	WRE3036WS	184 lb.	23.8 cu. ft.
F0450	WRE3036WH	184 lb.	23.8 cu. ft.

Listing Information




This fireplace has been tested and approved by PFS Corporation under UL127/ULC-S610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.

Clearances to Combustibles	
Description	Min. Clearance
Ceiling	40 (1016)
Back and sides of fireplace	3/4 (19)*
Floor	0 (0)**
Perpendicular wall to opening	12 (305)
Top spacers	0 (0)
Chimney outer pipe surface	1 (26)


* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

Clearances

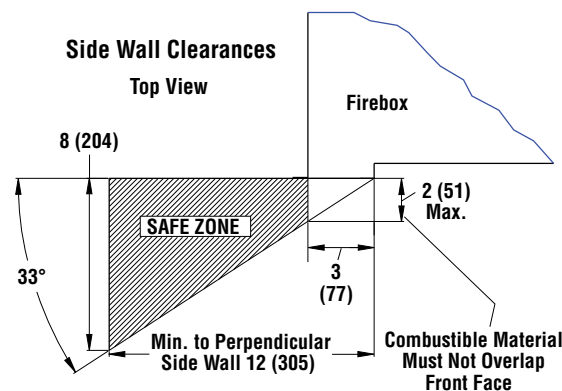


Mantel Clearances

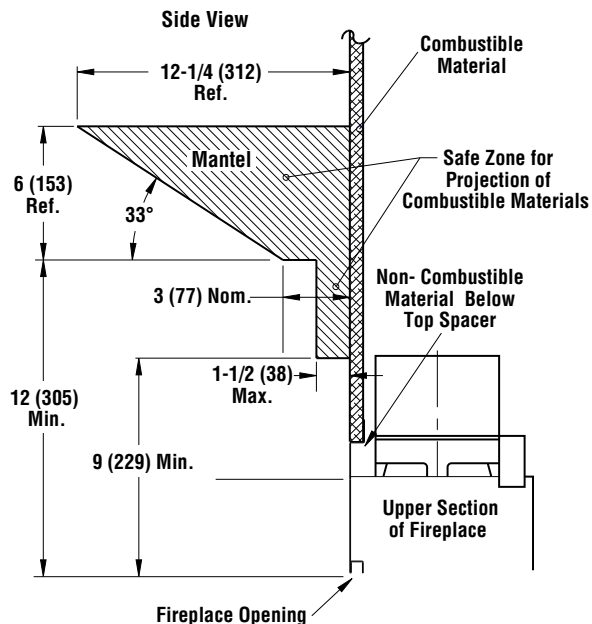

Inches (millimeters)

Venting


Venting
Uses Standard Wood-Burning Chimney (8DM)

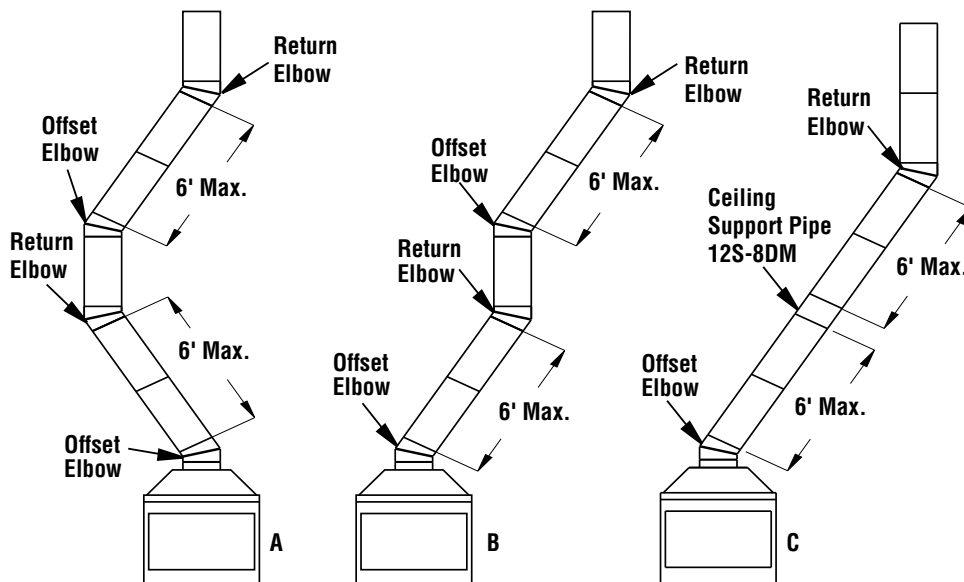


WRE3042 SERIES

RESIDENTIAL AND OUTDOOR WOOD-BURNING FIREPLACES

Framing Dimensions




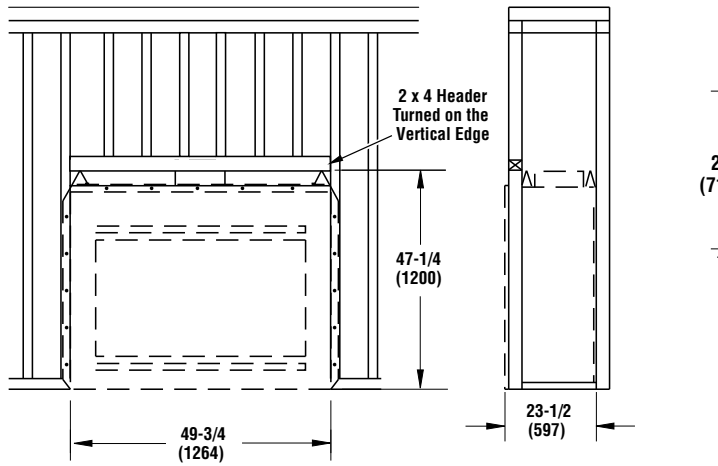


Parallel Framing Dimensions

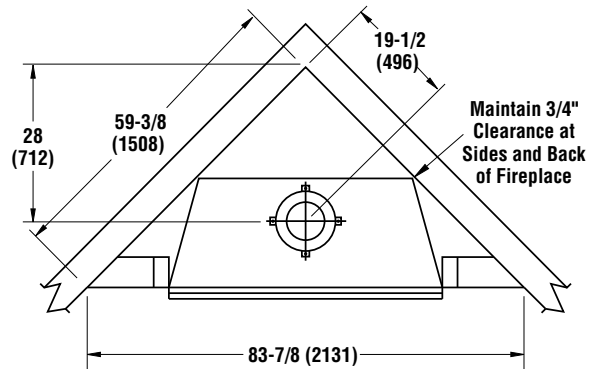

Corner Framing Dimensions


Fireplace Dimensions

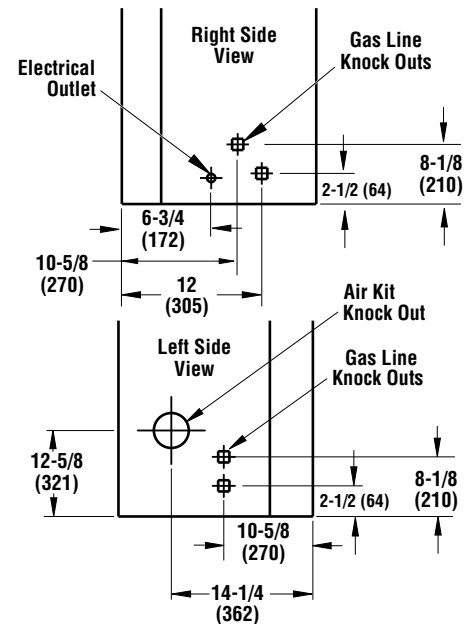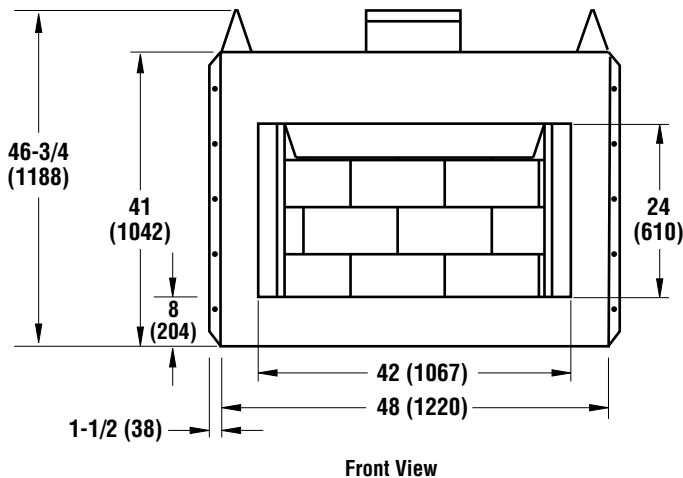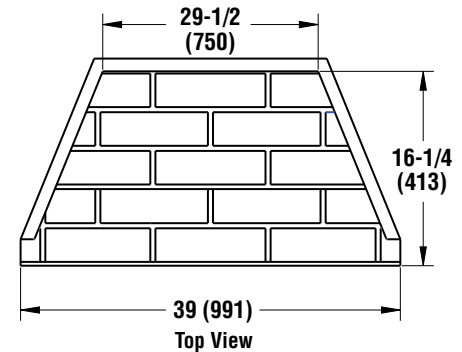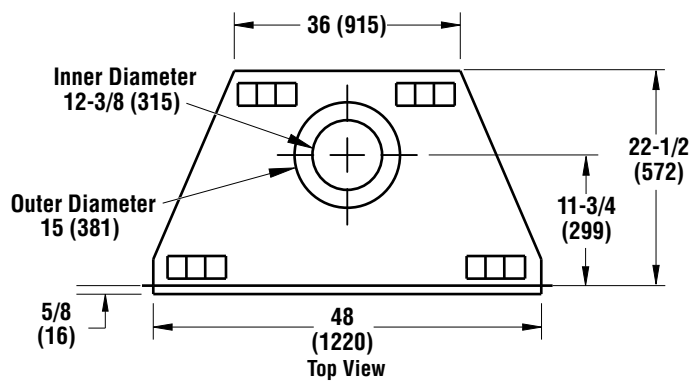

Inches (millimeters)

Product Information


Listing Information



Report No. 10-078

* Not required at nailing flanges
** See step 2 of Framing in the Installation and Operation Manual

Clearances

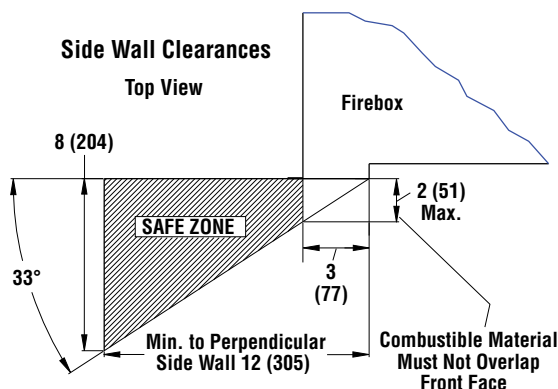

Side View

12-1/4 (312) Ref.

6 (153) Ref.

33°

Mantel

3 (77) Nom.

1-1/2 (38) Max.

12 (305) Min.

Combustible Material

Safe Zone for Projection of Combustible Materials

Non-Combustible Material Below Top Spacer


Upper Section of Fireplace

Fireplace Opening

Inches (millimeters)

Venting

Uses Standard Wood-Burning
Chimney (8DM)

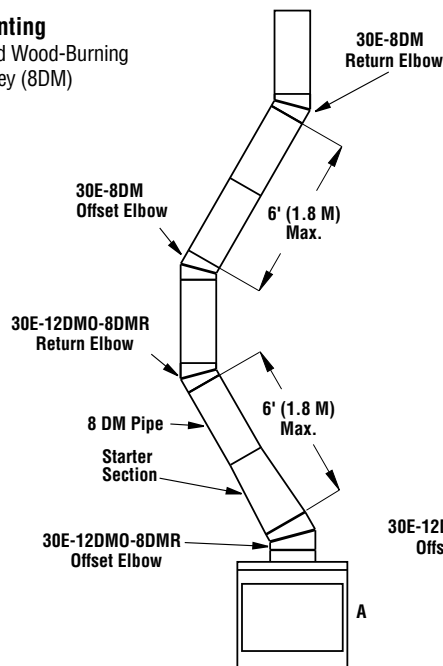

Typical Offset Installation

