

WRT4536 SERIES

Product Information

Product Reference Information			
Cat. No.	Model	Shipping Weight	Shipping Volume
F0620	WRT4536RS	550 lb.	131.5 cu. ft.
F0626	WRT4536WS	550 lb.	131.5 cu. ft.
F0621	WRT4536RH	550 lb.	131.5 cu. ft.
F0627	WRT4536WH	550 lb.	131.5 cu. ft.

Listing Information




This fireplace has been tested and approved by PFS Corporation under UL127/ULC-S610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.

Clearances


Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	1-1/2 (38)*
Ceiling	42 (1067)
Front of fireplace	48 (1220)
Floor	0 (0)**
Perpendicular wall to opening	12 (305)
Top spacers	0 (0)
Chimney outer pipe surface	1 (26)

* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

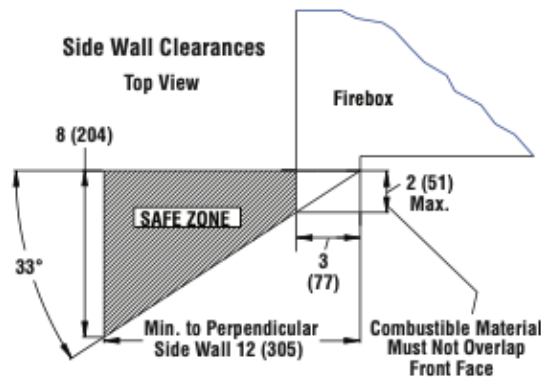


Mantel Clearances

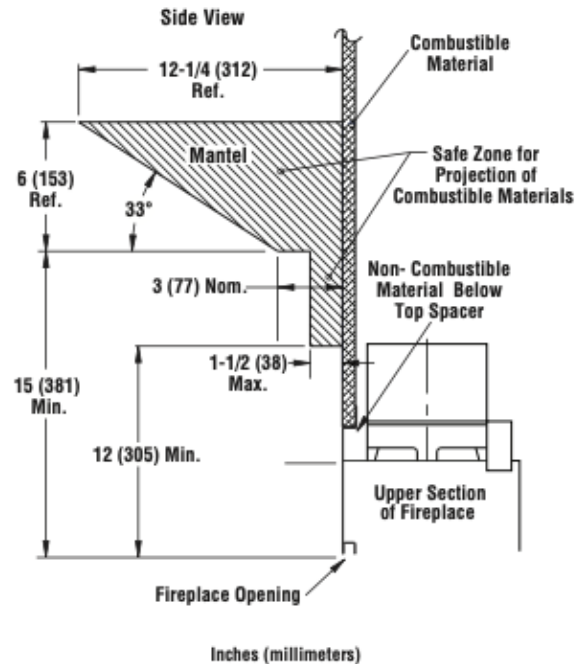

Venting


Venting
Uses Standard (12DM) and Hi-Temp (12HT) Wood-Burning Chimney. For Canada Use 12HT Chimney

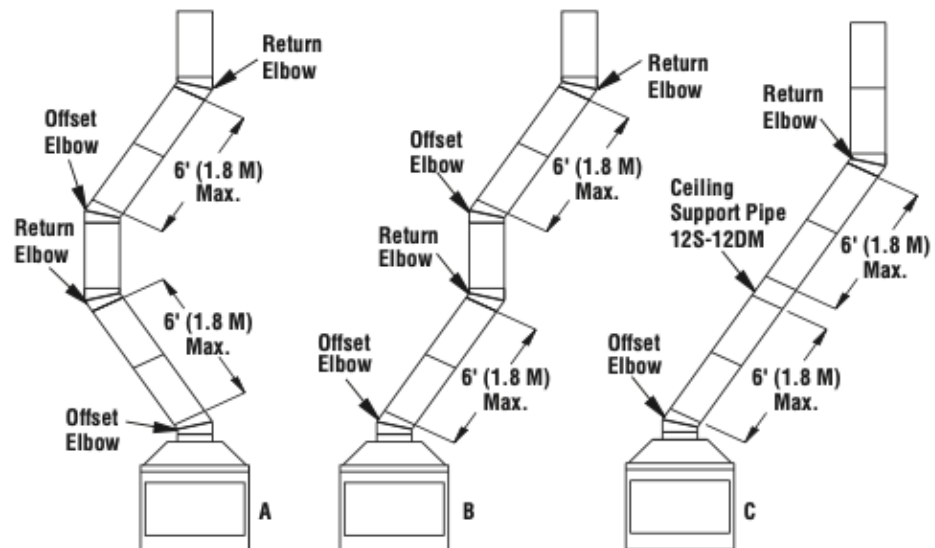

WRT4536 SERIES


INDOOR WOOD-BURNING FIREPLACES

Framing Dimensions


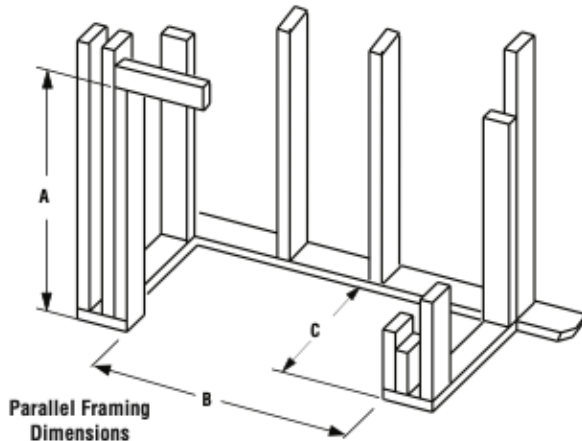


	A	B	C
36" Models	67-1/8 (1705)	45-5/8 (1159)	28-1/4 (718)



Inches (millimeters)

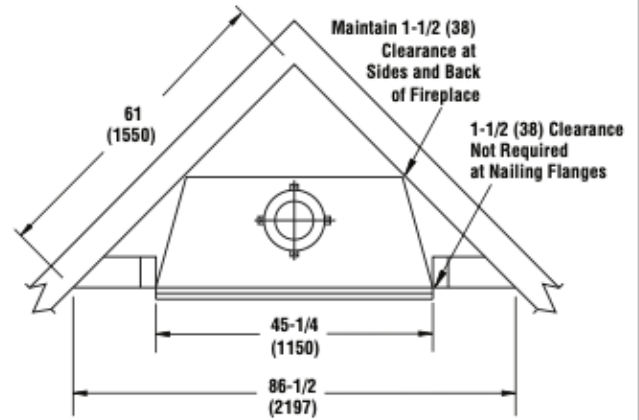

Inches (millimeters)

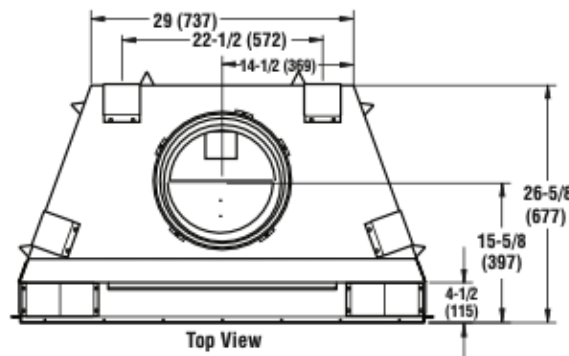


Fireplace Dimensions

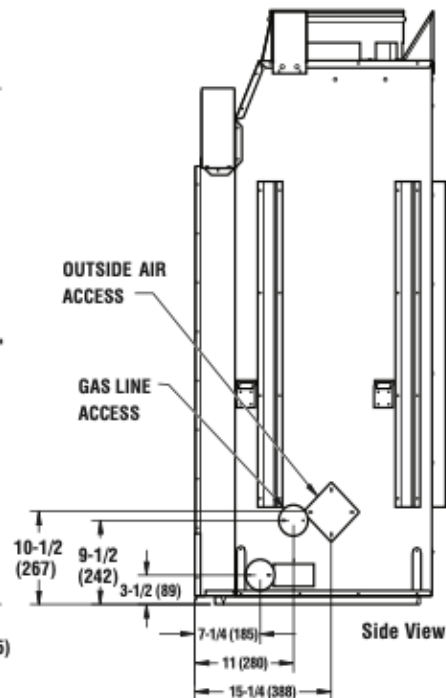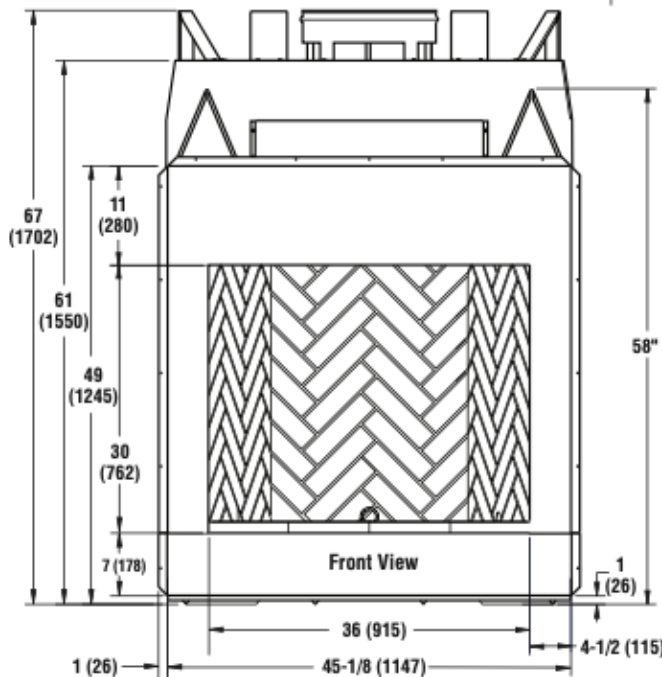


WRT4542 AND WRT4842 SERIES

WOOD-BURNING FIREPLACES

Framing Dimensions

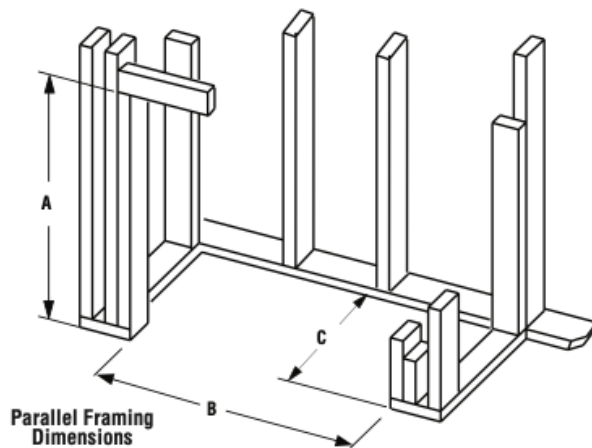


	A	B	C
42" Models	67-1/8 (1705)	51-5/8 (1312)	30-1/8 (766)

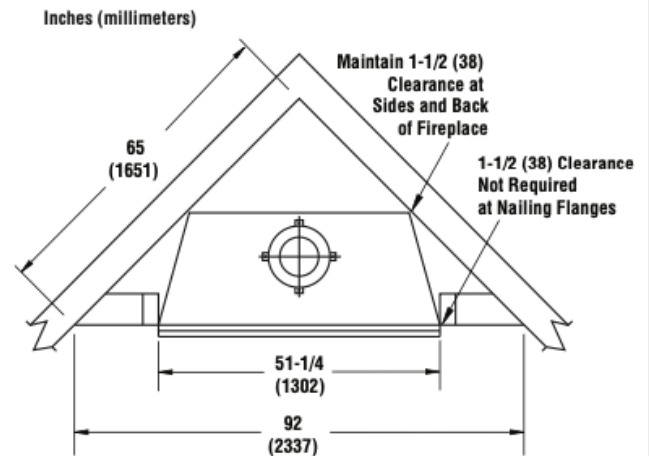


Corner Framing Dimensions

Inches (millimeters)

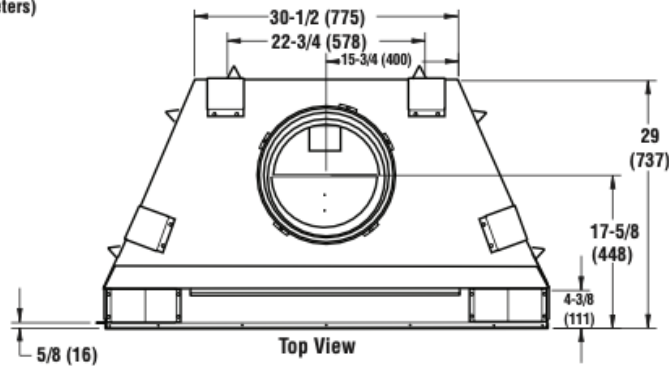


Top View




42" HEARTH

Fireplace Dimensions

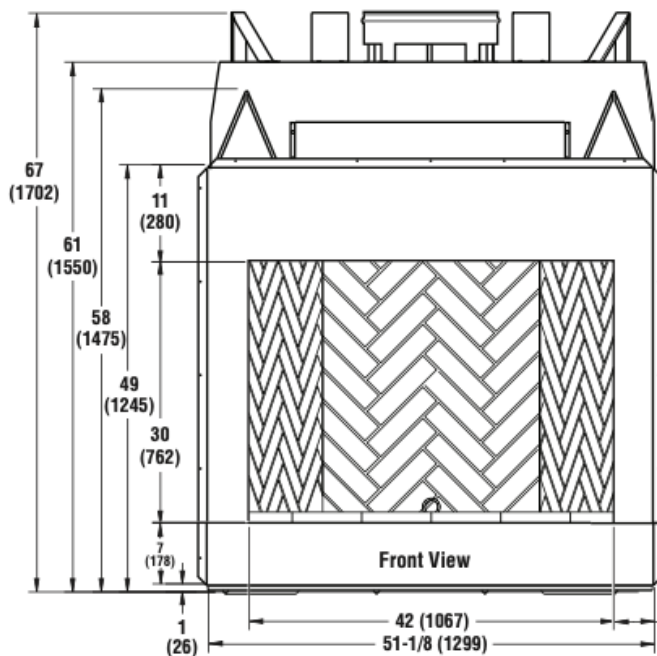

Front View

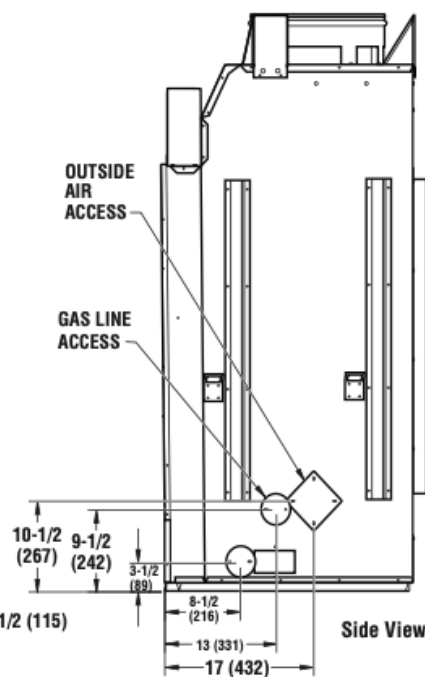

Side View

WRT4542 AND WRT4842 SERIES

Product Information

Product Reference Information			
Cat. No.	Models	Shipping Weight	Shipping Volume
F0622	WRT4542RS	570 lb.	131.5 cu. ft.
F0628	WRT4542WS	570 lb.	131.5 cu. ft.
F0623	WRT4542RH	570 lb.	131.5 cu. ft.
F0629	WRT4542WH	570 lb.	131.5 cu. ft.

Product Reference Information			
Cat. No.	PureFire™ Models	Shipping Weight	Shipping Volume
F0632	WRT4842RS	575 lb.	131.5 cu. ft.
F0634	WRT4842RH	575 lb.	131.5 cu. ft.

Listing Information



Report No. F09-095


This fireplace has been tested and approved by PFS Corporation under UL127/ULC-S610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.

Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	1-1/2 (38)*
Ceiling	42 (1067)
Front of fireplace	48 (1220)
Floor	0 (0)**
Perpendicular wall to opening	18 (457)
Top spacers	0 (0)
Chimney outer pipe surface	2 (51)


* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

Clearances

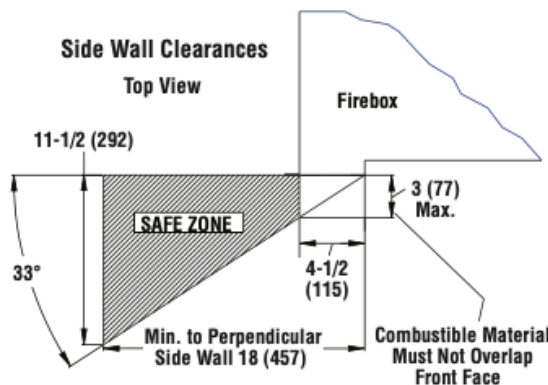


Mantel Clearances

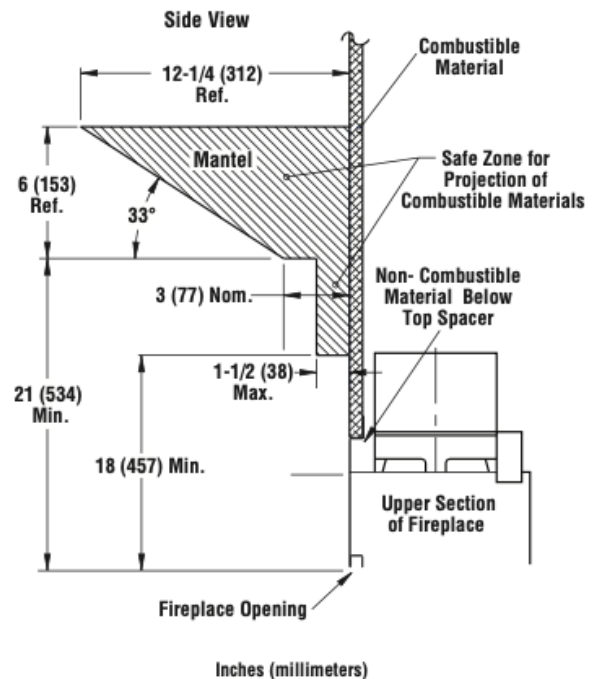

Venting


Venting
Uses Standard (12DM) and Hi-Temp (12HT) Wood-Burning Chimney. For Canada Use 12HT Chimney

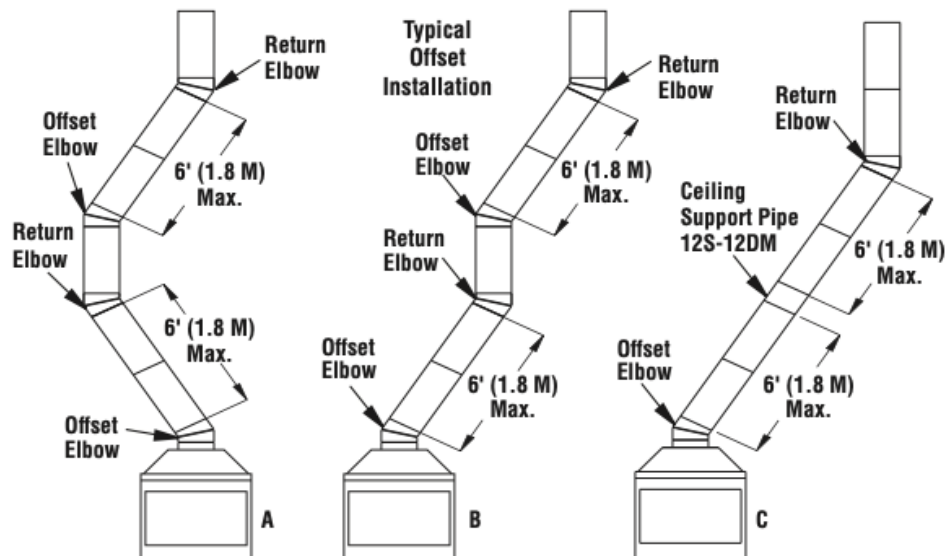


WRT4550 SERIES

INDOOR WOOD-BURNING FIREPLACES

Framing Dimensions

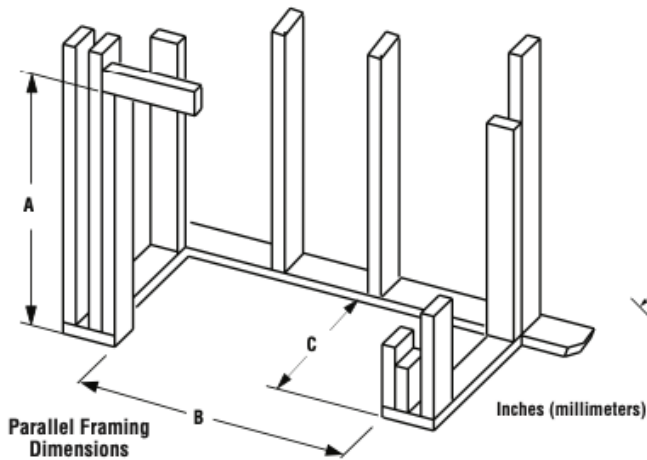


	50" Models
A	67-1/8 (1705)
B	59-3/4 (1518)
C	30-1/8 (766)

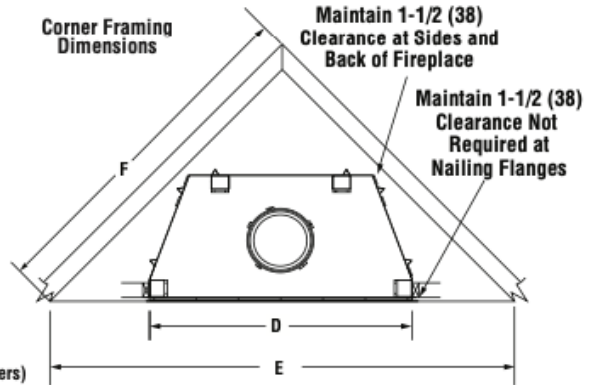

	50" Models
D	59-1/8 (1502)
E	100 (2540)
F	71 (1804)

Fireplace Dimensions

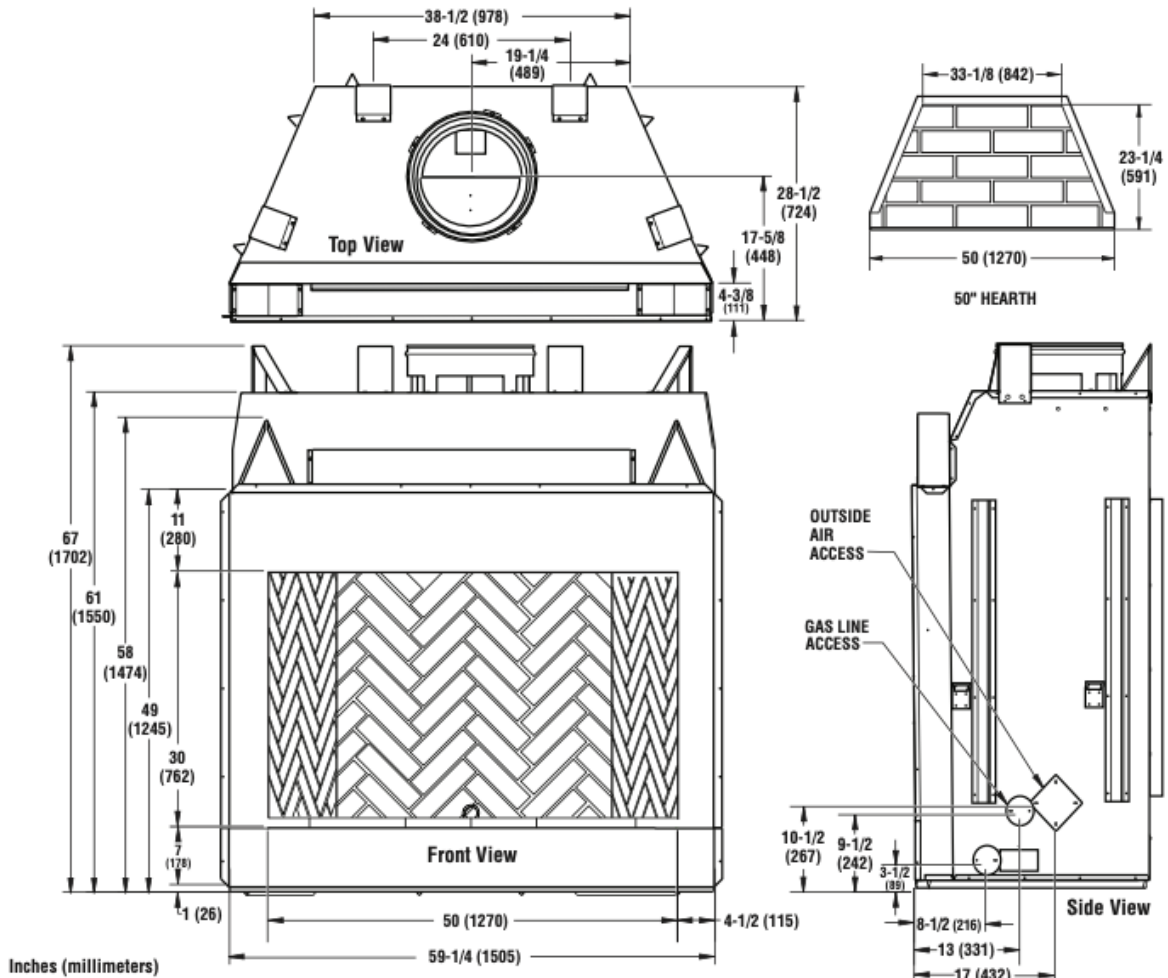

WRT4550 SERIES

Product Information

Product Reference Information			
Cat. No.	Model	Shipping Weight	Shipping Volume
F0624	WRT4550RS	630 lb.	131.5 cu. ft.
F0630	WRT4550WS	630 lb.	131.5 cu. ft.
F0625	WRT4550RH	630 lb.	131.5 cu. ft.
F0631	WRT4550WH	630 lb.	131.5 cu. ft.

Listing Information



Report No. F09-095

These fireplaces have been tested and approved by PFS Corporation under UL127/ ULC-S610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.


Clearances

Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	1-1/2 (38)*
Ceiling	42 (1067)
Front of fireplace	48 (1220)
Floor	0 (0)**
Perpendicular wall to opening	18 (458)
Top spacers	0 (0)
Chimney outer pipe surface	2 (51)


* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

Side Wall Clearances

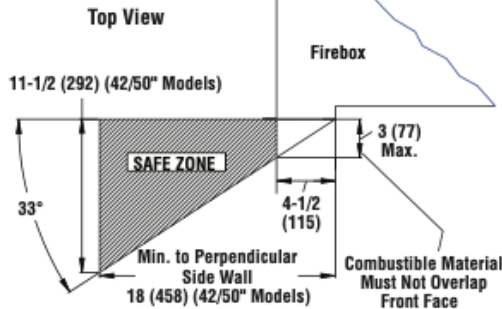

Mantel Clearances

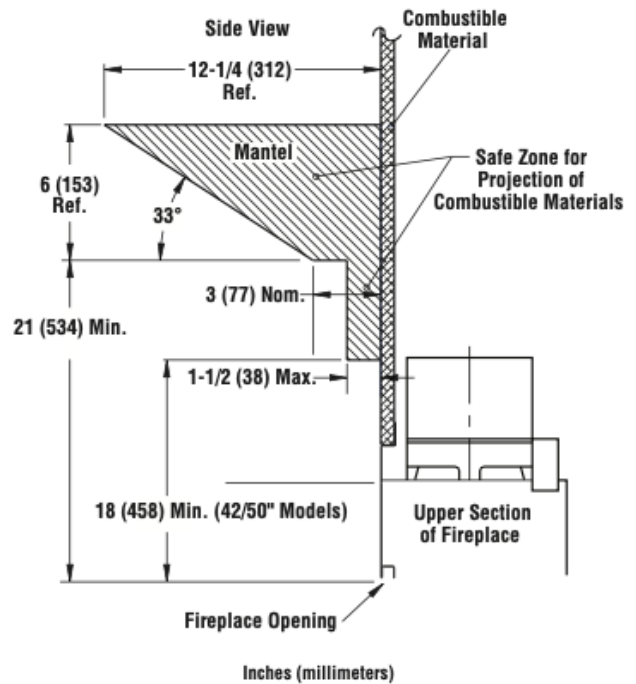

Venting

Venting
Uses Standard (12DM) and Hi-Temp (12HT) Wood Burning Chimney. For Canada Use 12HT Chimney

