



WRE4536 SERIES

OUTDOOR WOOD-BURNING FIREPLACES





Framing Dimensions

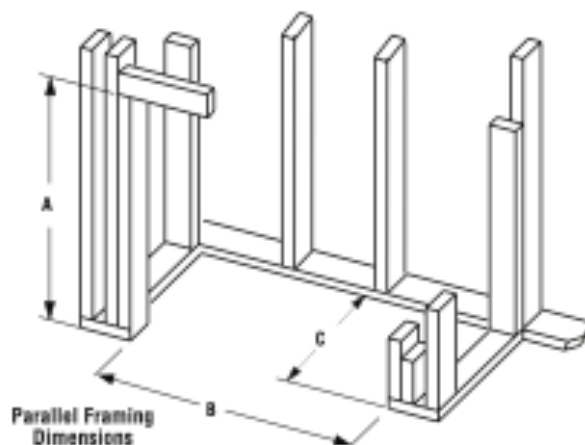

	A	B	C
36" Models	67-1/8 (1705)	45-5/8 (1158)	28-1/4 (718)

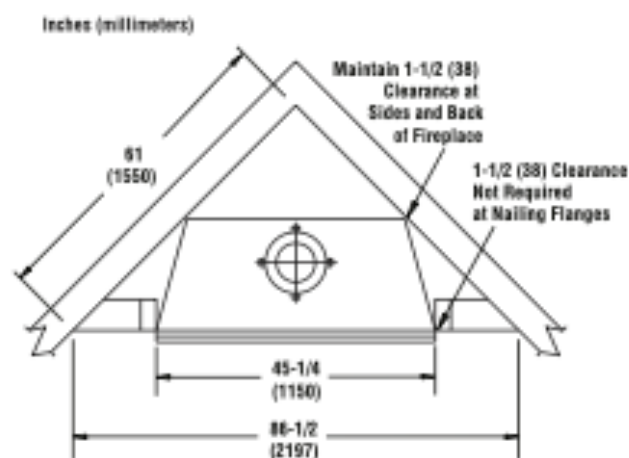

Fireplace Dimensions

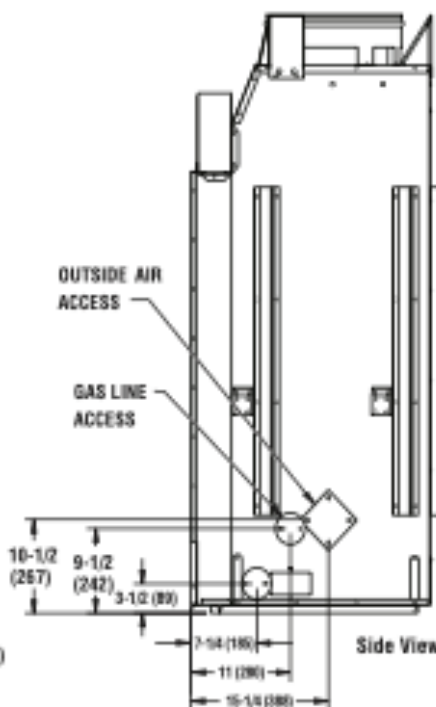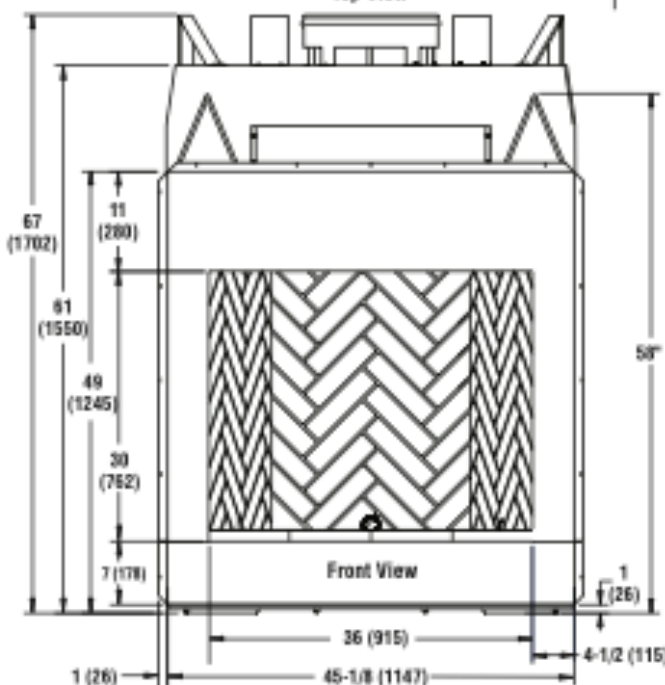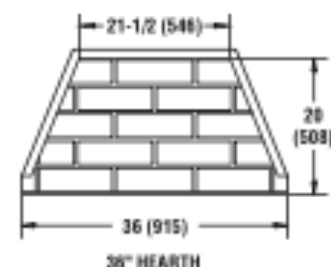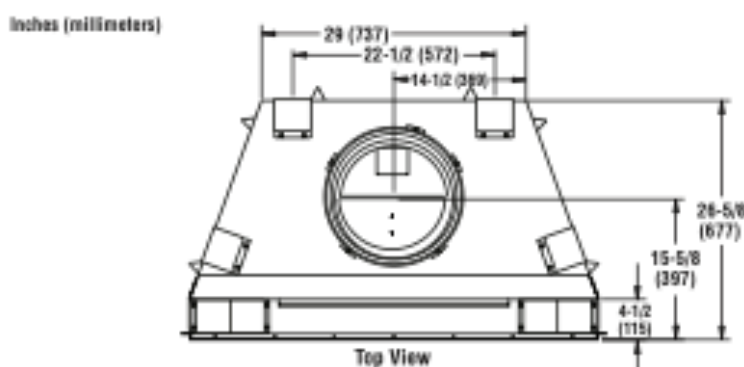

WRE4536 SERIES

Product Information

Product Reference Information			
Cat. No.	Model	Shipping Weight	Shipping Volume
F0437	WRE4536RS	520 lb.	131.5 cu. ft.
F0438	WRE4536WS	520 lb.	131.5 cu. ft.
F0439	WRE4536RH	520 lb.	131.5 cu. ft.
F0440	WRE4536WH	520 lb.	131.5 cu. ft.

Listing Information



Report No. F09-095


This fireplace has been tested and approved by PFS-Corporation under UL 127/ULC-5810 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.64 or Z21.51.2 standards.

Clearances


Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	1-1/2 (38) "
Ceiling	42 (1067)
Front of fireplace	48 (1220)
Floor	0 (0) "
Perpendicular wall to opening	12 (305)
Top spaces	0 (0)
Chimney outer pipe surface	1 (26)

* Not required at railing flanges

** See step 2 of Framing in the Installation and Operation Manual

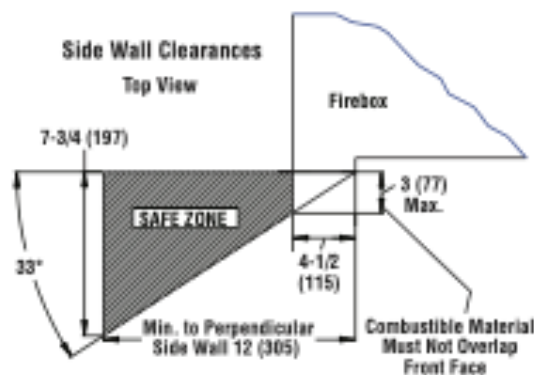


Mantel Clearances

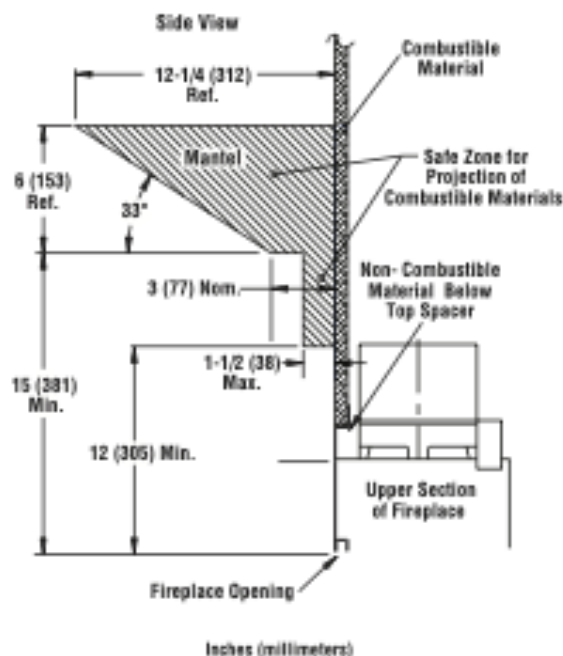

Venting


Venting
Uses Standard Wood Burning
Chimney (120M)

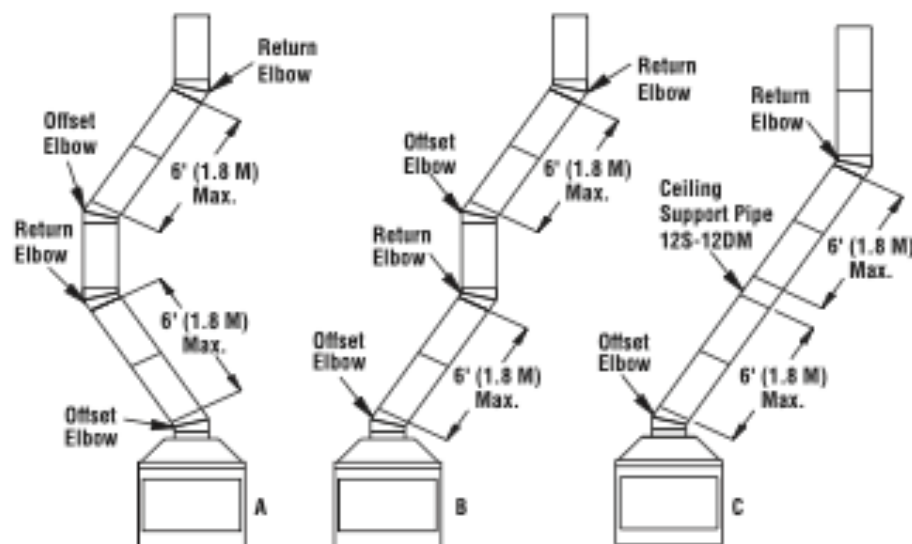

WRE4542 AND WRE4842 SERIES


OUTDOOR WOOD-BURNING FIREPLACES

Framing Dimensions

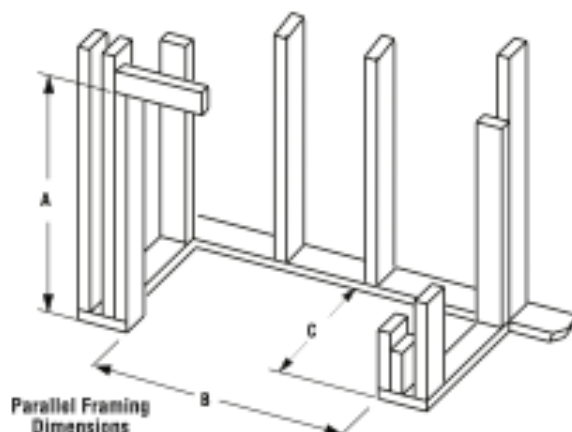


Parallel Framing Dimensions

	A	B	C
42" Models	67-1/8 (1706)	51-5/8 (1312)	30-1/8 (766)

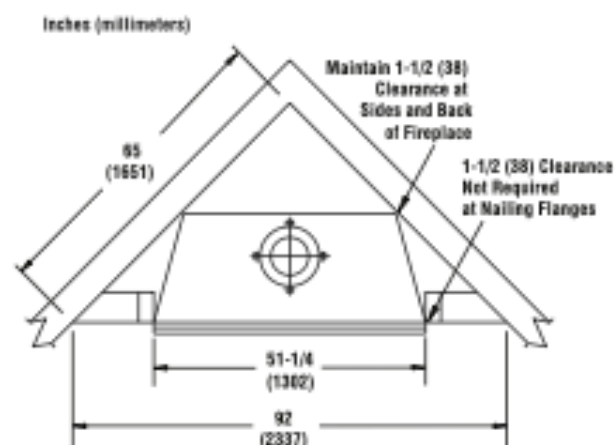


Corner Framing Dimensions

Inches (millimeters)

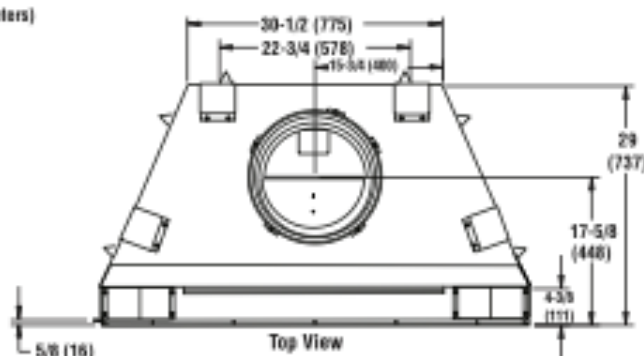


Top View




42" HEARTH

Fireplace Dimensions

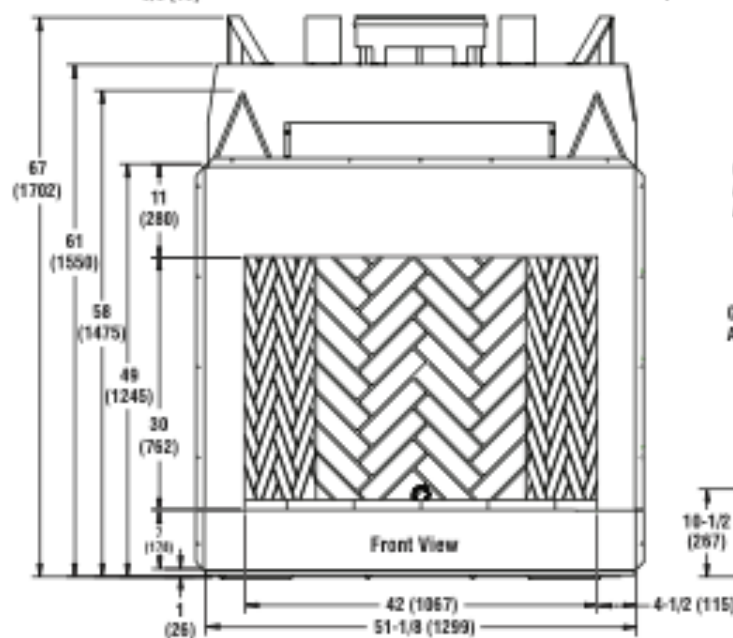

Front View

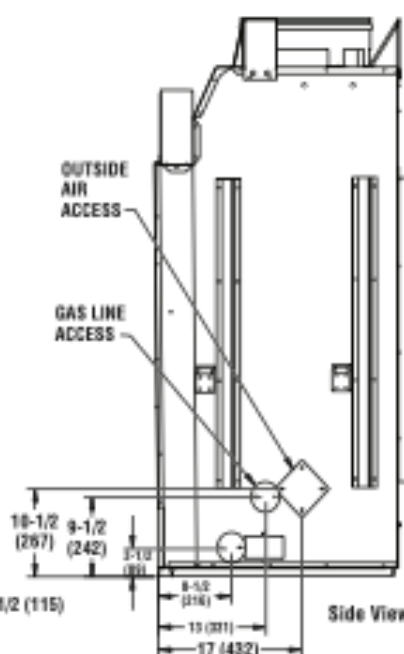

Side View

WRE4542 AND WRE4842 SERIES

Product Information

Product Reference Information			
Cat. No.	Models	Shipping Weight	Shipping Volume
FD441	WRE4542RS	572 lb.	131.5 cu. ft.
FD442	WRE4542WS	572 lb.	131.5 cu. ft.
FD443	WRE4542RH	572 lb.	131.5 cu. ft.
FD444	WRE4542WH	572 lb.	131.5 cu. ft.

Product Reference Information			
Cat. No.	PureFire™ Models	Shipping Weight	Shipping Volume
FD429	WRE4842RS	575 lb.	131.5 cu. ft.
FD430	WRE4842WS	575 lb.	131.5 cu. ft.
FD431	WRE4842RH	575 lb.	131.5 cu. ft.
FD432	WRE4842WH	575 lb.	131.5 cu. ft.

Listing Information



Report No. F99-055


This fireplace has been tested and approved by PFS Corporation under UL 127, L2-5519 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.69, Z21.84 or Z21.11.2 standards.

Clearances


Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	1-1/2 (38)*
Ceiling	42 (1067)
Front of fireplace	48 (1229)
Floor	0 (0)**
Perpendicular wall to opening	18 (457)
Top spacers	0 (0)
Chimney outer pipe surface	2 (51)

* Not required at railing flanges

** See step 2 of Framing in the Installation and Operation Manual

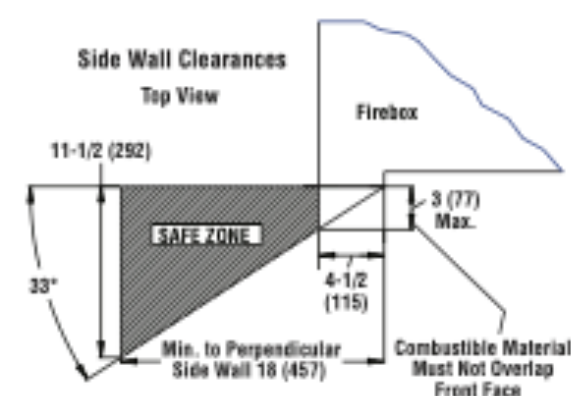


Mantel Clearances

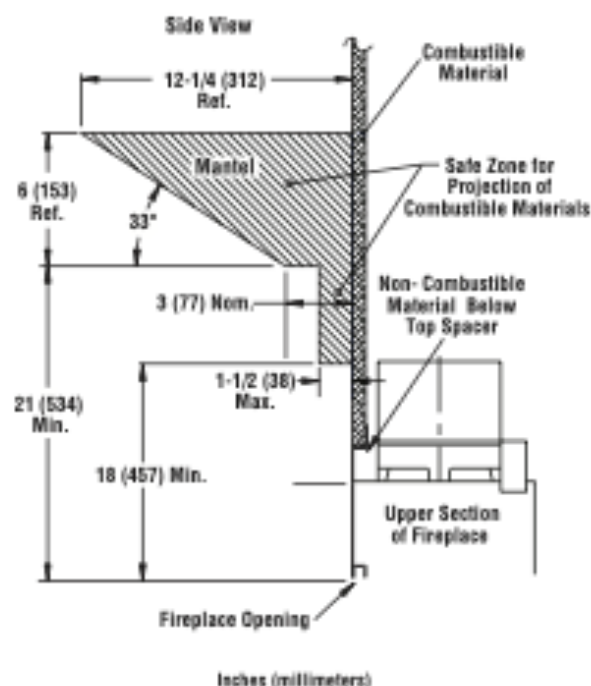

Venting


Venting
Uses Standard (120M) and Hi-Temp (12HT) Wood-Burning Chimney. For Canada Use 12HT Chimney

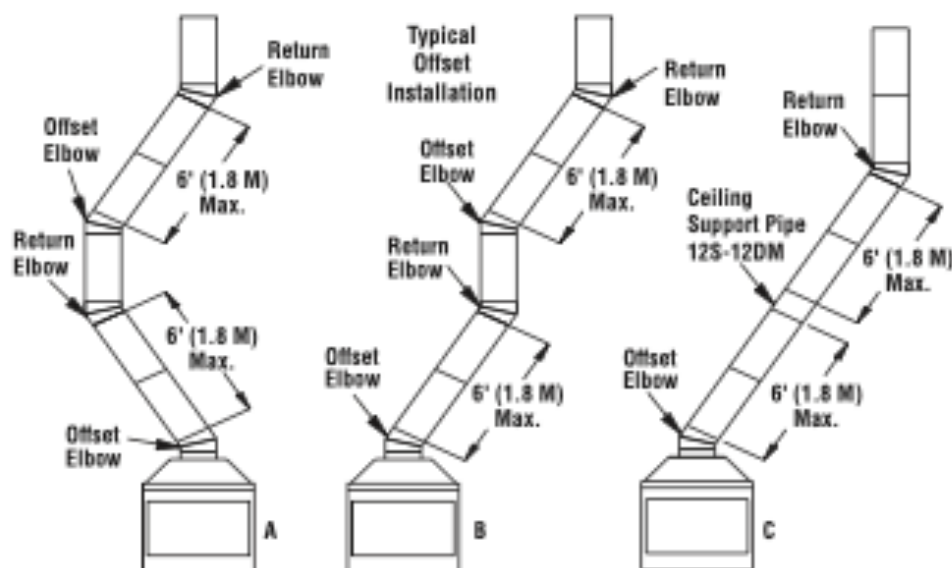

WRE4550 SERIES

OUTDOOR WOOD-BURNING FIREPLACES


Framing Dimensions

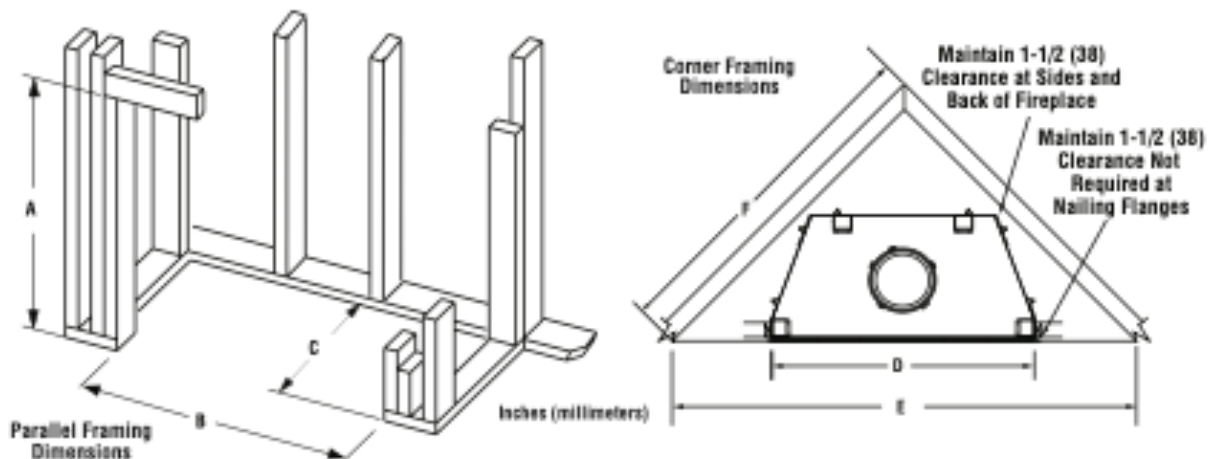

	50" Models
A	67-1/8 (1705)
B	59-3/4 (1518)
C	30-1/8 (766)

	58" Models
D	59-1/8 (1502)
E	100 (2540)
F	71 (1804)

Fireplace Dimensions

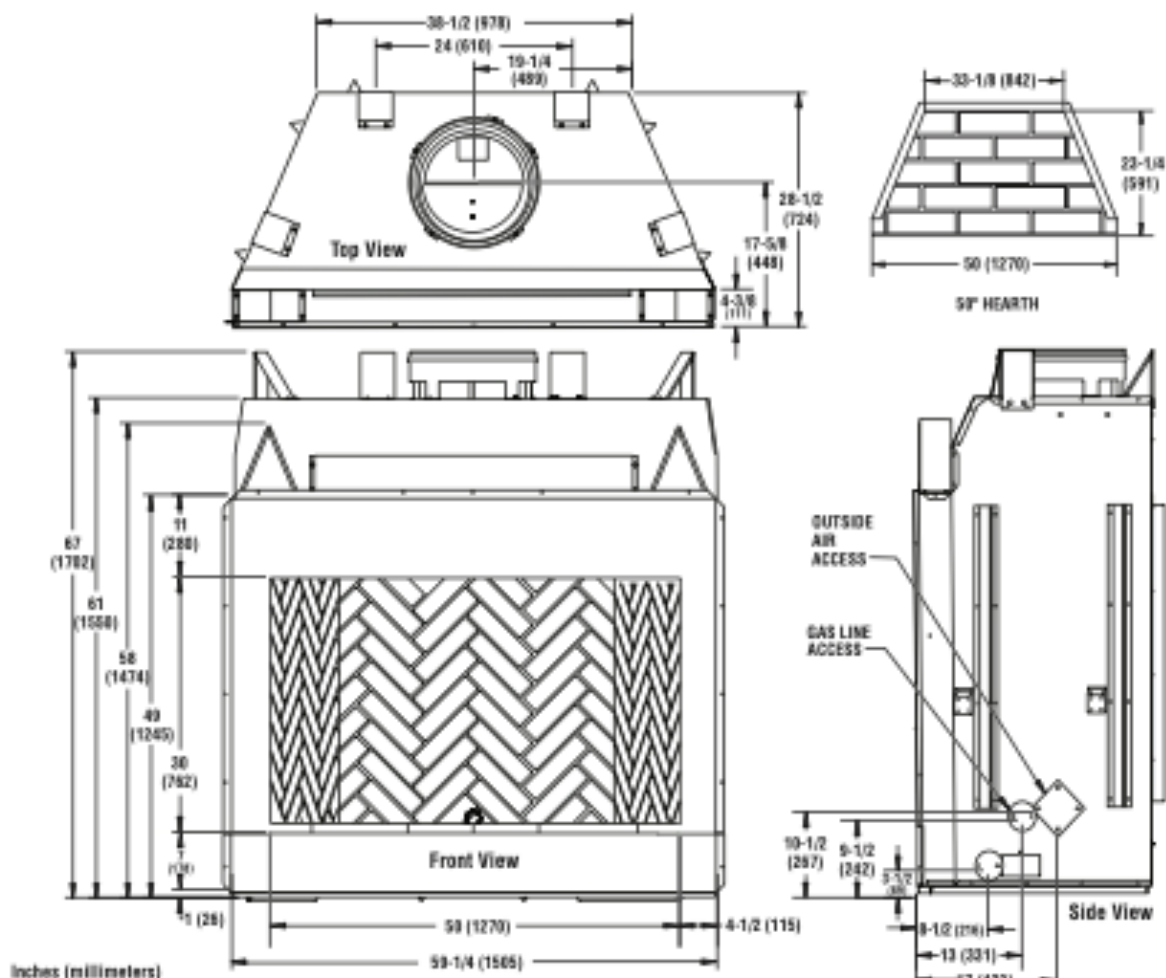

WRE4550 SERIES

Product Information

Product Reference Information			
Cat. No.	Model	Shipping Weight	Shipping Volume
FQ445	WRE4550RS	610 lb.	131.5 cu. ft.
FQ446	WRE4550WS	610 lb.	131.5 cu. ft.
FQ447	WRE4550RH	610 lb.	131.5 cu. ft.
FQ448	WRE4550WH	610 lb.	131.5 cu. ft.

Listing Information



Report No. FQ9-865


These fireplaces have been tested and approved by PFS Corporation under UL127/ULC-5610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.

Clearances


Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	1-1/2 (38)*
Ceiling	42 (1067)
Front of fireplace	46 (1220)
Floor	0 (0)**
Perpendicular wall to opening	18 (458)
Top spacers	0 (0)
Chimney outer pipe surface	2 (51)

* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

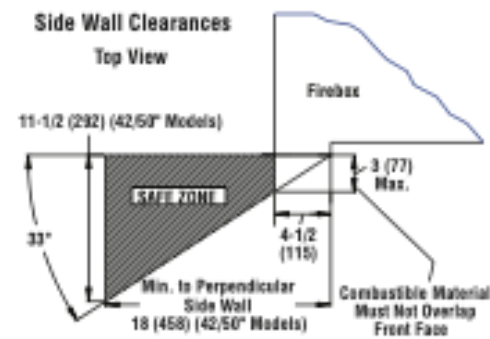

Mantel Clearances

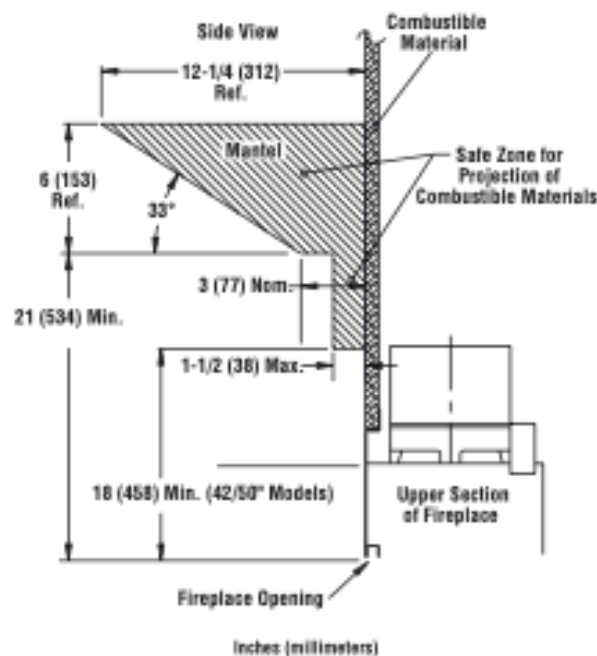

Venting

Venting
Uses Standard Wood Burning Chimney (120M)

