



EXPERIENCE THE  
Gi29 (VIDEO):





# GAS INSERTS **REDEFINED**

## Experience The Atmosphere Collection

Re-defining what's possible with a gas insert; the Atmosphere Collection was designed from the ground up to deliver more.

Sized and designed to fit into more spaces while still maintaining an industry-leading viewing area and provide unmatched views of our new revolutionary infusion burner technology.


Pick your look with mix & match accessories totaling almost 450 different combinations of logs, faceplates, surrounds, and interior panels, so you get the look that best suits your unique style and your unique home.

Enjoy more standard features with built-in fan to help improve room heating capacity and ember-bed lighting standard on most models.

More technology, more options, more realism, and more value. With Regency's Atmosphere collection you get more!

# **INFUSION BURNER**

## Experience The Most Realistic Fire



Inspired by nature and fueled by innovation, Regency's new patent-pending infusion burner technology delivers an unparalleled realistic flame and log set.

By cleverly infusing the burner into the logs, our team of engineers have created an unmatched flame picture that wraps naturally around the logs and dances effortlessly in the firebox - giving you the appearance and beauty of a real wood fire, with all the convenience of gas.

Experience the new Infusion burner throughout our Atmosphere lineup and enjoy flames so realistic your guests will have a hard time telling whether it's wood or gas!

# REGENCY ATMOSPHERE Gi25

## Extra Small Gas Insert



Gi25 shown with 3-sided faceplate and oak log set and black brick panels.



Gi25LE shown with 3-sided finishing trim, painted black inner panels, and driftwood log set.



Gi25LE shown with a regular faceplate, 4-sided finishing trim, painted black inner panels, and oak log set.



Gi25LE shown with a regular 3-sided faceplate, painted black inner panels, and oak log set.

### NEW Gi25LE • Extra Small Gas Insert

This unit personifies the expression, “Great things come in small packages.” Designed to fit into smaller spaces, the Gi25LE sports an impressive viewing area highlighting its infusion burner, an improved high-definition artisan-crafted log set, and a modern, flush design.

SPECIFICATIONS Gi25LE	NATURAL GAS	PROPANE
Input (BTU)	20,500	20,500
Turn down to (BTU)	14,500	17,000
Efficiency (steady state)	63.33	68.33%
EnerGuide Rating (Canada only)	63.60%	63.60%

DIMENSIONS	
Height	17"
Width	25"
Depth	15"
Viewing Area	212 sq. in.

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.





Gi25LE shown with 3-Sided finishing trim, brown brick panels and oak log set.



Gi25LE shown with a regular 4-sided faceplate, painted black inner panels, and oak log set.



Gi25LE shown with a regular faceplate, adjustable hearth riser, and birch log set.



Gi25LE shown with 3-sided trim, oversized backing plate, and oak log set.

## STANDARD FEATURES

- NEW: innovative, patented infusion burner
- Invisimesh safety screen for a clear view of the fire
- Proflame II GTMF remote control system
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

## OPTIONS

- Multiple faceplate styles
- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Premium and traditional surrounds in various colors
- Wifi Kit for app control
- Flush installation options
- Mantel deflector for reduced clearances
- Oversized and custom backing plates
- Hearth trim kit for raised hearth installations
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

# REGENCY ATMOSPHERE Gi27

## Small Gas Insert



Gi27 shown with 4-sided faceplate and oak log set and black brick panels



Gi27LE shown with 3-sided finishing trim, herringbone inner panels, and driftwood log set



Gi27LE shown with a regular faceplate, 4-sided finishing trim, painted black inner panels, and oak log set.



Gi27LE shown with a regular 3-sided faceplate, painted black inner panels, and birch log set.

### NEW Gi27LE • Small Gas Insert

This unit personifies the expression, "Great things come in small packages." Designed to fit into smaller spaces, the Gi27LE sports an impressive viewing area highlighting its infusion burner design, an improved high-definition artisan-crafted log set, and a modern, flush design.

SPECIFICATIONS Gi27LE	NATURAL GAS	PROPANE
Input (BTU)	25,000	22,000
Turn down to (BTU)	17,000	17,500
Efficiency (steady state)	69.11	68.58
EnerGuide Rating (Canada only)	63.6%	64.15%

DIMENSIONS	
Height	18"
Width	27"
Depth	15"
Viewing Area	258 sq. in.

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.





Gi27LE shown with 3-sided finishing trim, black panels and driftwood logs



Gi27LE shown with a regular 4-sided faceplate, herringbone inner panels, and oak log set.



Gi27LE shown with a regular faceplate, adjustable hearth riser, and birch log set.



Gi27LE shown with 3-sided trim, oversized backing plate, and driftwood log set.

## STANDARD FEATURES

- NEW: innovative, patented infusion burner
- Invisimesh safety screen for a clear view of the fire
- Ember bed lighting for a realistic glow
- Proflame II GTMF remote control system
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

## OPTIONS

- Multiple faceplate styles
- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Premium and traditional surrounds in various colors
- Wifi Kit for app control
- Flush installation options
- Mantel deflector for reduced clearances
- Oversized and custom backing plates
- Hearth trim kit for raised hearth installations
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

# REGENCY ATMOSPHERE Gi29

Medium Gas Insert



Gi29LE shown with 3-sided flush faceplate, black reflective glass inner panels, and oak log set.



Gi29LE shown with 3-sided finishing trim, black inner panels, and oak log set.



Gi29LE shown with a regular faceplate, premium brushed nickel surround, black inner panels, and oak log set.



Gi29LE shown with a regular 3-sided faceplate, painted black inner panels, and oak log set.

## GI29LE | GI29LU • Medium Gas Inserts

Experience beauty in a standard sized firebox. The first of our Atmosphere Collection, the Gi29 exemplifies luxury with a dynamic flame filled firebox designed to fit into the most commonly occurring fireplace openings.

SPECIFICATIONS Gi29LE	NATURAL GAS	PROPANE
Input (BTU)	31,500	31,500
Turn down to (BTU)	17,000	17,000
Efficiency (steady state)	71.70%	70.20%
EnerGuide Rating (Canada only)	63.88%	62.33%

MINIMUM FIREPLACE OPENING	
Width (front)	29"
Width (rear)	20"
Height	20-1/4"
Depth	16-3/4"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.





Gi29LE shown with a regular faceplate with traditional antique copper surround, volcanic black brick inner panels, and oak log set.



Gi29LE shown with a regular 4-sided faceplate, painted black inner panels, and driftwood log set.



Gi29LE shown with a regular faceplate, adjustable hearth riser, herringbone inner panels and birch log set.



Gi29LE shown with 3-sided trim, oversized backing plate, castlestone inner panels and oak log set.

## STANDARD FEATURES

- NEW: innovative, patent-pending infusion burner
- Invisimesh safety screen for a clear view of the fire
- Ember bed lighting for a realistic glow (LE units only)
- Proflame II GTMF remote control system (LE units only)
- Standing pilot (Direct spark ignition - LU units only)
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

## OPTIONS

- Oak, birch or driftwood log sets
- Faceplates in various designs
- Premium and traditional surrounds in various colors
- Interior panels in Herringbone, Castlestone, Brown, Volcanic Black or Painted Black
- Reflective black glass interior panels
- Oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kit for raised hearth installations
- Wifi Kit for app control
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit



# REGENCY ATMOSPHERE Gi33

Large Gas Insert



Gi33LE shown with a regular faceplate, premium sunset bronze surround, painted black inner panels, and birch log set.



Gi33LE shown with 3-sided finishing trim, black inner panels, and oak log set



Gi33LE shown with a regular faceplate, premium traditional surround in antique copper, painted black inner panels, and oak log set.



Gi33LE shown with a regular 3-sided faceplate, painted black inner panels, and oak log set.

## NEW Gi33LE • Large Gas Insert

Experience beauty enlarged. The large version of our stunning Atmosphere Collection, the Gi33LE offers luxurious flame pictures and flame pictures in a big firebox. Designed to maximize heat output and flame enjoyment of the most commonly occurring large fireplace openings.

SPECIFICATIONS Gi33LE	NATURAL GAS	PROPANE
Input (BTU)	38,500	36,500
Turn down to (BTU)	20,500	20,000
Efficiency (steady state)	68.60%	69.50%
EnerGuide Rating (Canada only)	64.30%	64.32%

MINIMUM FIREPLACE OPENING	
Width (front)	33"
Width (rear)	22-3/8"
Height	24"
Depth	18"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.



Gi33LE shown with 4-sided finishing trim, herringbone brick inner panels, and oak log set.



Gi33LE shown with a regular 4-sided faceplate, painted black inner panels, and driftwood log set.



Gi33LE shown with a regular faceplate, adjustable hearth riser, herringbone inner panels and birch log set.



Gi33LE shown with 3-sided trim, oversized backing plate, castlestone inner panels and oak log set.

## STANDARD FEATURES

- NEW: innovative, patented infusion burner
- Invisimesh safety screen for a clear view of the fire
- Ember bed lighting for a realistic glow
- Proflame II GTMF remote control system
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

## OPTIONS

- Oak, birch or driftwood log sets
- Faceplates in various designs
- Premium and traditional surrounds in various colors
- Interior panels in Herringbone, Castlestone, Brown, Volcanic Black or Painted Black
- Reflective black glass interior panels
- Oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kit for raised hearth installations
- Wifi Kit for app control
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit




# OTHER OPTIONS

## DIRECT VENT TECHNOLOGY


A Regency gas insert is a specially engineered, sealed fireplace that slips into your existing masonry or pre-fab fireplace to create a high-efficiency heating system with a beautiful fire. The airtight firebox uses outside air for combustion, helping maintain indoor air quality and keeping all the warmth generated from your fireplace in your home.

Even when the fireplace is turned off, the sealed system will prevent cold air from entering the home and warm air from leaving.

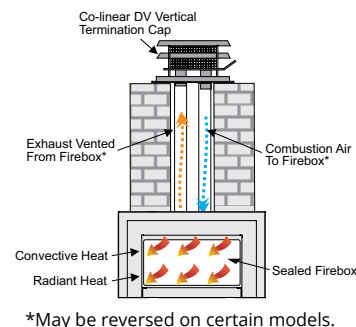

## PROFLAME II GAS INSERT HARDWIRE KIT

This kit allows you to have a hard-wire electrical connection within your existing fireplace for a safe and cord free installation.




## INTELLIGENT IGNITION SYSTEM\*

Regency gas fireplace inserts feature an Intelligent Ignition System that lights the pilot only when needed, reducing gas usage and costs. In colder climates, it can be set to Continuous Pilot Mode (CPI), keeping the pilot lit for up to seven days. With a new 5-second Flame Failure Response Time (FFRT) sensor, it ensures reliable ignition even in cold conditions, enhancing performance and efficiency.

\*Not available on L234, U31, E33, Gi29LU.

## SPREAD THE WARMTH

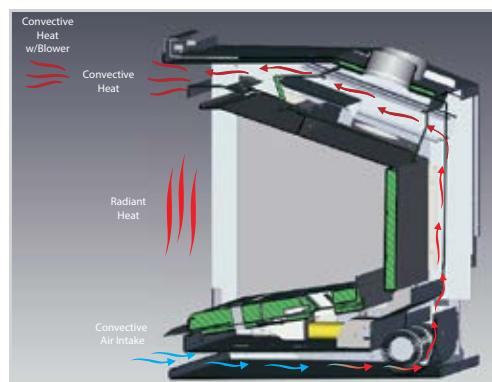

Blower

Note: This unit is only available in select markets.

## REMARKABLE EFFICIENCY

The precision-engineered heat exchanger systems dramatically increase the overall heating efficiency of these Regency gas inserts. The cold air from your room passes through the pre-heated heat exchanger system, which is then re-distributed back into your room as comforting warm air (also known as convection heat).

## POWERFUL RADIANT HEAT

Not only do these gas inserts include the latest innovations in fireplace technology and efficiencies, they also generate a large amount of radiant heat from the flames of the fire package. The heat from the fire radiates through the ceramic glass and transfers that warmth to you, providing the perfect combination of radiant and convective heat distribution.

## VARIABLE SPEED BLOWER TO MAXIMIZE EFFICIENCY

Regency blowers are a standard feature with all gas inserts. A blower will let you enjoy the warmth of your fireplace from any corner of your living space. Our quiet blowers increase the efficiency of your fireplace by pushing the heat produced by your fireplace forward, distributing it further, and evenly into your room.

# ATMOSPHERE COLLECTION – ACCESSORIES

Mix & match accessories along with almost 450 different combinations create the look you desire. The modular accessory system, featured in our most flexible gas inserts ever, enables you to tailor your fireplace to match your home and décor perfectly.

## FRONT OPTIONS



3-sided & 4-sided  
Finishing Trim



Regular Faceplate  
with Premium Sunset  
Bronze Surround



Flush 3-Sided Faceplate



Flush 4-Sided Faceplate



Flush Faceplate with  
Traditional Surround


## PREMIUM SURROUNDS



Black



White



Sunset Bronze



Grey



Brushed Nickel




Black



Brushed Antique  
Copper

## TRADITIONAL SURROUNDS

## INTERIOR PANEL OPTIONS



Brown Brick



Herringbone Brick



Castlestone Brick



Volcanic Black Brick



Painted Black



Reflective Black Glass

## FIREBED OPTIONS



Oak Log Set



Birch Log Set



Driftwood Log Set

## BACKING PLATES



Custom 3-sided



Custom 4-sided



Oversized



# ATMOSPHERE COLLECTION – SPECIFICATIONS

ACCESSORIES		Gi25 (ELECTRONIC IGNITION)	Gi27 (ELECTRONIC IGNITION)	Gi29LU STANDING PILOT 820 (US ONLY)	Gi29LE • Gi33LE ELECTRONIC IGNITION
Ceramic Glass		✓	✓	✓	✓
Proflame II Remote Control		✓	✓	•	✓
On/Off Remote Control with Thermostat		•	•	✓	•
Blower (with Fan Speed Control)		✓	✓	✓	✓
Emberbed Lights		•	•	•	✓
Inner Panels (must choose 1)	Brown Brick	★	★	★	★
	Herringbone Brick	★	★	★	★
	Castlestone Brick	•	•	★	★
	Volcanic Black Brick	★	★	★	★
	Reflective Black Glass	•	★	★	★
	Painted Black	✓	✓	★	★
Faceplates with Safety Screen (must choose 1)	Regular	★	★	★	★
	Flush 3-Sided	★	★	★	★
	Flush 4-Sided	★	★	★	★
	3-Sided Finishing Trim	★	★	★	★
	4-Sided Finishing Trim	★	★	★	★
Premium Surrounds	Black	★	★	★	★
	Grey	★	★	★	★
	White	★	★	★	★
	Sunset Bronze	★	★	★	★
	Brushed Nickel	★	★	★	★
Traditional Surrounds	Black	★	★	★	★
	Brushed Antique Copper	★	★	★	★
Backing Plates	Oversized	★	★	★	★
	Custom 3-Sided	★	★	★	★
	Custom 4-Sided	★	★	★	★
Media (must choose 1)	Driftwood Log Set	★	★	★	★
	Birch Log Set	★	★	★	★
	Oak Log Set	★	★	★	★
	*Log Grate/Ember Media (Must order when purchasing either oak or Birch log set)	•	•	★	★
Wall Thermostat	Basic	★	★	★	★
	Programmable	★	★	★	★
Wifi Kit		★	★	•	★
Mantel Deflector		★	★	★	★
Adjustable Hearth Trim		★	★	★	★
Turn down flame modulator		✓	✓	✓	✓
Intelligent ignition system		✓	✓	•	✓
Propane Conversion Kit		★	★	★	★
30° angled flue		✓	✓	✓	✓
Gas Insert Hardwire Kit		★	★	•	★

• Not available    ✓ Standard    ★ Optional

NOTE: The premium surrounds may only be used on the regular faceplate and the traditional surrounds on the flush 3-sided faceplate.

# OTHER OPTIONS

## MAXIMIZING COMFORT AND EFFICIENCY

Regency Fireplace Inserts deliver controllable heat solutions that combine the latest in radiant and convection heat technology with innovative features:

- Adjustable flame/heat control with Proflame remote controls (not available for U31)
- Heat radiating ceramic glass for maximum radiant heat
- Safety screen
- Variable speed blower to distribute heat into the farthest corners of your room
- Intelligent Ignition System\* features fuel-saving intermittent pilot ignition (IPI), 7-day continuous pilot mode (CPI), and 5-second Flame Failure Response Time (FFRT) for more reliable startups, even in cold weather.
- Power's Out, Heat's On. Never worry about being cold during a power outage again! All Regency gas fireplaces operate without electricity. Enjoy peace of mind all winter long.

\*Not available for L234, U31, E33, Gi29LU.

## REMOTE CONTROL - INCLUDED



Proflame I GTMF Remote Control

\*May be black on select models.



Proflame II GTMF Remote Control

Create optimal comfort with ease and convenience at the touch of a button with a Regency remote control. Our **user-friendly programmable controls** can be set, adjusted, and programmed for your fireplace to turn on at the temperature you want, when you want it.

FEATURE	DESCRIPTION	PROFLAME REMOTES		
		GT	GTM	GTMF
On/off		✓	✓	✓
Child lock		✓	✓	✓
LCD backlit screen		✓	✓	✓
Temperature display	°F / °C	✓	✓	✓
Thermostat	one setting (all days)	✓	✓	✓
Smart thermostat**		✓	✓	✓
Flame adjustment	(6 levels)	•	✓	✓
Fan control	(6 levels)	•	•	✓


• Not available

✓ Standard

\*\*Smart Thermostat - Rather than a thermostat that simply turns your fireplace on and off, the smart control function allows you to set your desired room temperature. As the room reaches your personal setting, the flame intensity and heat will gradually decrease - keeping the ambiance of your Regency fire on with less heat output, and the option to turn it off at any time.

## SAFETY SCREEN

Regency has integrated a custom designed safety screen into each faceplate design that meets or exceeds current North American safety legislation.



## APP CONTROL\*

The optional Wifi enabled module provides the ultimate fireplace control with the ProFlame Connect Plus App.





\*Available on select units.





# Gi25, Gi27, Gi29 & Gi33 SPECIFICATIONS

Three-Sided Faceplate



Four-Sided Faceplate




	FACEPLATE	DIMENSIONS		C - DEPTH	D - BOTTOM HEIGHT
		A - WIDTH	B - HEIGHT		
Gi25	Regular Faceplate	35-3/4"	23-1/4"	1-1/4"	--
	3-Sided Flush Faceplate	35-3/4"	23-1/4"	1/8"	--
	4-Sided Flush Faceplate	35-3/4"	26-3/8"	1/8"	4-3/16"
	Screen with 3-Sided Finishing Trim	28-1/4"	18-3/4"	1/16"	--
	Screen with 4-Sided Finishing Trim	28-1/4"	20"	1/16"	1-1/8"
	Oversized Backing Plate	44-5/8"	29-5/8"	1/8"	--
	3-Sided Custom Backing Plate	30-1/4"	19-3/4" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	30-1/4"	22-1/8" - 45"	1/8"	2-1/8" minimum
Gi27	Regular Faceplate	35-3/4"	23-1/4"	1-1/4"	--
	3-Sided Flush Faceplate	35-3/4"	23-1/4"	1/8"	--
	4-Sided Flush Faceplate	35-3/4"	26-3/8"	1/8"	3-5/8"
	Screen with 3-Sided Finishing Trim	31-7/8"	19-3/4"	1/16"	--
	Screen with 4-Sided Finishing Trim	30-1/4"	21"	1/16"	1-1/8"
	Oversized Backing Plate	44-5/8"	29-5/8"	1/8"	--
	3-Sided Custom Backing Plate	30-1/4" - 56-7/8"	19-3/4" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	30-1/4" - 69"	22-1/8" - 45"	1/8"	2-1/8"
Gi29	Regular Faceplate	40-3/16"	26"	1-1/4"	--
	Regular Faceplate w/ Premium Surround	40-13/16"	26-3/8"	1-11/16"	--
	3-Sided Flush Faceplate	40-3/16"	26"	1/8"	--
	4-Sided Flush Faceplate	40-3/16"	29-1/4"	1/8"	4-3/16"
	Screen with 3-Sided Finishing Trim	31-7/8"	21-7/8"	1/16"	--
	Screen with 4-Sided Finishing Trim	31-7/8"	23-1/8"	1/16"	1-1/8"
	Oversized Backing Plate	47-1/2"	31-1/2"	1/8"	--
	3-Sided Custom Backing Plate	33-7/8" - 56-7/8"	22-7/8" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	33-7/8" - 69"	25-1/8" - 45"	1/8"	2-1/8" minimum
Gi33	Flush Faceplate w/Traditional Surround	45-3/4"	28-3/4"	2-1/4"	--
	Regular Faceplate	46-5/16"	30-7/8"	1-5/16"	--
	Regular Faceplate w/ Premium Surround	46-3/4"	31-1/8"	1-11/16"	--
	3-Sided Flush Faceplate	46-1/8"	30-3/4"	1/8"	--
	4-Sided Flush Faceplate	46-1/8"	37-1/16"	1/8"	6"
	Screen with 3-Sided Finishing Trim	35-15/16"	25-11/16"	1/16"	--
	Screen with 4-Sided Finishing Trim	35-15/16"	26-15/16"	1/16"	1-1/8"
	Oversized Backing Plate	50-1/4"	33"	1/8"	--
	3-Sided Custom Backing Plate	38" - 56-7/8"	26-3/4" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	38" - 69"	29" - 45"	1/8"	2-1/8" minimum
	Flush Faceplate w/Traditional Surround	51-5/8"	30-3/4"	2-3/16"	--

NOTE: All product specifications are subject to change without notice.  
Always refer to the relevant product manual for full and up-to-date information.


# Gi25, Gi27, Gi29 & Gi33 SPECIFICATIONS

## MINIMUM FIREPLACE DIMENSIONS

DIMENSIONS							
MODEL	A - HEIGHT	B - MAX. LINTEL BAR DEPTH	C - DEPTH	D - DAMPER OPENING	E - FRONT DEPTH TO TAPER	F - WIDTH (REAR)	G - WIDTH (FRONT)
Gi25	17"	10-1/2"	15"	8" x 4" min	1-5/8"	15"	25"
Gi27	18"	10-1/2"	15"	8" x 4" min	1-5/8"	17-1/2"	27"
Gi29	20-1/4"	11-3/8"	16-3/4"	8" x 4" min.	2-5/8"	20"	29"
Gi33	24"	12-1/4"	18"	9" x 5" min.	3-1/2"	22-3/8"	33"

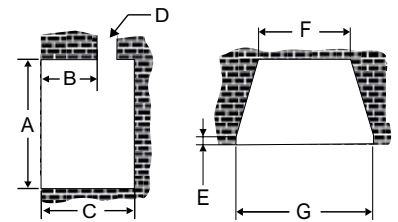

	FACEPLATE	DIMENSIONS				
		A - MINIMUM INSTALL WIDTH	B - MINIMUM INSTALL HEIGHT	C - MINIMUM INSTALL DEPTH	D - MINIMUM REAR WIDTH	E - TAPER DEPTH
Gi25	Regular Faceplate	25"	17"	15"	15"	1-5/8"
	Regular Faceplate w/ Backing Plate	26-3/4"	18-1/4"	15"	15"	3-1/8"
	Flush Faceplate	26-1/2"	18"	16-1/4"	15"	2-5/8"
	Flush Faceplate w/ Backing Plate	26-3/4"	18-1/8"	16-1/8"	15"	4"
	4-Sided Flush Faceplate	26-1/2"	18-1/8"	16-1-4"	15"	2-5/8"
	Finishing Trim	26-1/2"	18"	16-1-4"	15"	2-5/8"
	Finishing Trim w/ Backing Plate	26-1/4"	18-1/4"	16-1/8"	15"	4-1/4"
	4-Sided Finishing Trim	26-1/2"	18-1/8"	16-1/4"	15"	2-5/8"
Gi27	Regular Faceplate	27"	18"	15"	17-1/2"	1-5/8"
	Regular Faceplate w/ Backing Plate	29"	19-1/4"	14-7/8"	17-1/2"	3-1/8"
	Flush Faceplate	29"	19"	16-1/4"	17-1/2"	2-5/8"
	Flush Faceplate w/ Backing Plate	29"	19-1/4"	14-1/8"	17-1/2"	5/8"
	4-Sided Flush Faceplate	28-1/2"	19-1/4"	16-1/4"	17-1/2"	2-5/8"
	Finishing Trim	28-1/2"	19"	16-1/4"	17-1/2"	2-5/8"
	Finishing Trim w/ Backing Plate	29"	19-1/4"	16-1/8"	17-1/2"	4-1/2"
	4-Sided Finishing Trim	28-1/2"	19-1/4"	16-1/4"	17-1/2"	2-5/8"
Gi29	Regular Faceplate	28-7/16"	20-1/4"	16-11/16"	20"	2-13/16"
	Regular Faceplate w/ Backing Plate	30-7/8"	21-7/16"	16-3/4"	20"	2-11/16"
	Regular Faceplate w/ Premium Surround	28-7/16"	20-1/4"	16-5/8"	20"	2-5/8"
	Regular Faceplate w/ Premium Surround and Backing Plate	30-7/8"	21-7/16"	16-1/2"	20"	2-1/2"
	Flush Faceplate	30"	21-1/16"	17-15/16"	20"	3-7/8"
	Flush Faceplate w/ Backing Plate	30-7/8"	21-7/16"	17-13/16"	20"	3-3/4"
	4-Sided Flush Faceplate	30"	21-5/16"	17-15/16"	20"	3-7/8"
	Finishing Trim	30"	21-1/16"	18"	20"	3-15/16"
	Finishing Trim w/ Backing Plate	30-7/8"	21-7/16"	17-7/8"	20"	3-7/8"
	4-Sided Finishing Trim	30"	21-5/16"	18"	20"	3-15/16"
Gi33	Flush Faceplate w/Traditional Surround	28-7/16"	20-1/4"	15-15/16"	20"	1-7/8"
	Regular Faceplate	33"	24"	18"	22-3/8"	3-1/2"
	Regular Faceplate w/ Backing Plate	30-7/8"	21-7/16"	17-7/8"	22-3/8"	2-11/16"
	Regular Faceplate w/ Premium Surround	28-7/16"	20-1/4"	17-3/4"	22-3/8"	2-5/8"
	Regular Faceplate w/ Premium Surround and Backing Plate	30-7/8"	21-7/16"	17-5/8"	22-3/8"	2-1/2"
	Flush Faceplate	30"	21-1/16"	19-3/16"	22-3/8"	3-7/8"
	Flush Faceplate w/ Backing Plate	34-7/8"	25-1/4"	19-1/8"	22-3/8"	4-3/8"
	4-Sided Flush Faceplate	34-1/8"	25"	19-1/4"	22-3/8"	4-1/2"
	Finishing Trim	34-3/16"	24-7/8"	19-1/4"	22-3/8"	4-1/2"
	Finishing Trim w/ Backing Plate	30-7/8"	25-1/4"	19-3/16"	22-3/8"	4-1/8"
	4-Sided Finishing Trim	34-3/16"	25"	19-1/4"	22-3/8"	4-1/2"
	Flush Faceplate w/Traditional Surround	33"	24"	17-1/8"	22-3/8"	2-1/2"

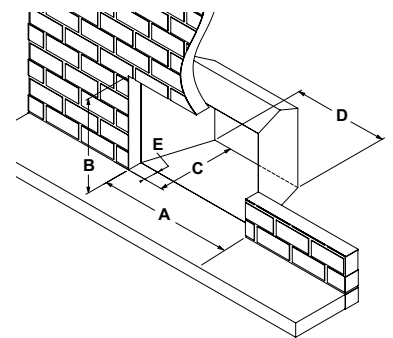

# DIMENSIONS


FACEPLATES		E33		U31		L234	
		WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Vignette (3-Sided)		46-1/2"	28-3/4"	--	--	--	--
Vignette (4-Sided)		46-1/2"	30-7/8"	--	--	--	--
Custom Faceplate (3-Sided Vignette Only)		Custom Order Only		--	--	--	--
Spacer (3-Sided Vignette Only)		45"	28"	--	--	--	--
Low Profile (3-Sided)	Front Plate	42-7/16"	26-3/4"	36"	22-1/8"	29-1/8"	21"
	Rear Plate	46-1/2"	28-11/16"	40-13/16"	24"	32-7/8"	22-7/8"
Low Profile (3-Sided Oversize)	Front Plate	42-7/16"	26-3/4"	--	--	--	--
	Rear Plate	49-9/16"	33-1/8"	--	--	--	--
Low Profile (3-Sided) Custom	Rear Plate	Custom Order Only					
Low Profile (4-Sided) Custom	Rear Plate	Custom Order Only					
Hearth Trim - Sizes		Please See Manual For Details					

## MINIMUM CLEARANCES

MINIMUM CLEARANCE TO COMBUSTIBLES	Gi25LE	Gi27LE	Gi29LE	Gi29LU	Gi33LE
A Side Wall	8"	8"	8"	8"	8"
B Ceiling	60"	60"	60"	60"	60"
C Mantel Height (Min.)	29-5/8"	30"	32-3/4"	32-3/4"	36-1/2"
	(With Optional Deflector) 26-5/8"	28"	30-3/4"	30-3/4"	34-1/2"
D Mantel Depth (Min.)	1-1/2"	9"	1-1/2"	1-1/2"	1-1/2"
	(With Optional Deflector) 1-1/2"	9"	1-1/2"	1-1/2"	1-1/2"
E Alcove Width	54"	54"	54"	54"	56"
F Max. Alcove Depth	36"	36"	36"	36"	36"

NON-COMBUSTIBLE HEARTH REQUIREMENT					
G Hearth Height	0"	0"	0"	0"	*0-2"
H Hearth Width	0"	0"	0"	0"	*36"
I Hearth Depth	0"	0"	0"	0"	*12"

\* Hearth not required if appliance is raised off the ground 2" from Finished Floor.

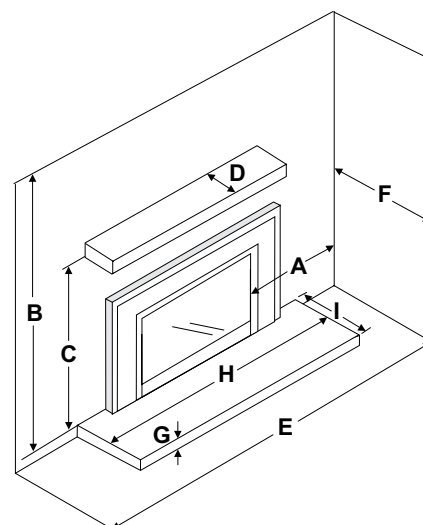

MINIMUM CLEARANCE TO COMBUSTIBLES	HRi6E	LRi6E	HRi4E	LRi4E	HRi3E	LRi3E	E33	U31	L234
A Side Wall	12"	12"	8"	8"	6"	6"	8"	10"	8"
B Ceiling	60"	60"	60"	60"	60"	60"	72"	67"	73"
C Mantel Height (Min.)	40"	40"	35"	35"	38"	38"	40"	32-1/2"	38"
	(With Optional Deflector) 36"	36"	32"	32"	28"	28"	N/A	N/A	N/A
D Mantel Depth (Min.)	1"	1"	1"	1"	1"	1"	0 - 3-1/2"	0 - 3-1/2"	1"
	(With Optional Deflector) 1"	1"	1"	1"	1"	1"	N/A	N/A	N/A
E Alcove Width	56"	56"	54"	54"	54"	54"	76"	48"	60"
F Max. Alcove Depth	36"	36"	36"	36"	36"	36"	36"	36"	36"

NON-COMBUSTIBLE HEARTH REQUIREMENT									
G Hearth Height	1-3/8"	1-3/8"	1/2"	1/2"	1/2"	1/2"	1-1/4"	0"	1-1/2"
H Hearth Width	44"	44"	40"	40"	36"	36"	45-1/2"	0"	28"
I Hearth Depth	14"	14"	14"	14"	12"	12"	13"	0"	12"

NOTE: All product specifications are subject to change without notice. Always refer to the relevant product manual for full and up-to-date information.